
K-STROEV AG UNTEN

Check valves, male thread at bottom

Caractéristiques

Construction	Ball seat valve (ball in brass seat)
Boîtier	Aluminium

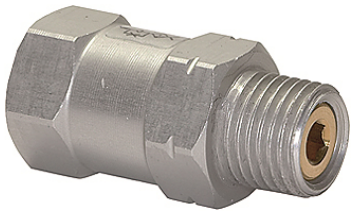

Remarque

Autres informations sur demande.

Description

Check valves close the vacuum line if the suction pad is not covered, thus maintaining the vacuum. The valves are protected against dirt by a replaceable sieve. This valve series is suitable for all suction pads in our standard range.

Article

Désignation	Filetage 1	Filetage 2	Longueur (mm)
K- 07 45 01 55	G 1/8 female	G 1/8 male	26,0
K- 07 45 01 54	G 1/4 female	G 1/4 male	26,0
K- 07 45 01 53	G 1/2 female	G 1/2 male	29,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.