
K-DRS ELK ANSCHLUSS M VAKUUM

Pressure switches, electrical connection M 12 x 1

Caractéristiques

Domaine d'utilisation	Pneumatic applications
Fréquence de commutation	200/min.
Tension de commutation	max. 250 V AC / 28 V DC
Plage de réglage	-0.85 / +1 bar
Indice de protection	IP 65 (DIN 43650), IP 67 (M 12 x 1)
Plage de température	-10 °C to +80 °C
Capuchon mobile	Aluminium, powder-coated
Boîtier	Special die-cast material
Membrane, joint d'étanchéité	Perbunan



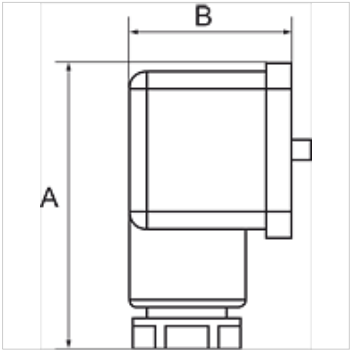

Remarque

Autres informations sur demande.

Description

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Article

Désignation	Raccord	A (mm)	B (mm)
K- 07 30 28 52	Bride	48,0	28,0
K- 07 30 28 54	G 1/4	48,0	28,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.