


# K-3 BKR T DOPPELWIRKEND T1

Stainless steel ball valves, 3-way, with double-acting actuator, T-bore, normal position T1

**HANSA FLEX**

## Caractéristiques

|  |  |
|--|--|
| <b>Construction</b>                            | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback                                |
| <b>Perçage</b>                                 | forme T  |
| <b>Pression de service</b>                     | max. 63 bar (depending on temperature and nominal size)  |
| <b>Température de service</b>                  | -20 °C to +70 °C   |
| <b>Angle de rotation</b>                       | 90 °   |
| <b>Boîtier</b>                                 | Interface actuator / valve: four or eight threaded holes in the drive housing according to EN ISO 5211, Interface actuator / S |
| <b>Pression de commande</b>                    | 5.5 bar  |
| <b>Adaptateur vanne</b>                        | Acc. to NAMUR  |
| <b>Entraînement</b>                            | aluminium eloxed   |
| <b>Étanchéité de l'entraînement</b>            | NBR  |
| <b>Robinet à boisseau sphérique</b>            | Stainless steel 1.4401, with ISO-flange plate  |
| <b>Étanchéité robinet à boisseau sphérique</b> | PTFE/FKM   |

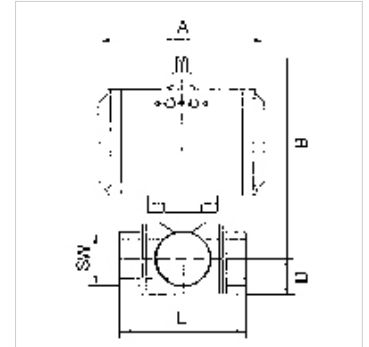

## Remarque

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)  
Autres informations sur demande.

## Description

3-way cock, reduced bore

## Informations supplémentaires

Other T-positions on request

## Article

| Désignation    | DN | Filets   | Mise en place | A<br>(mm) | B<br>(mm) | D<br>(mm) | L<br>(mm) | SW<br>(mm) |
|----------------|----|----------|---------------|-----------|-----------|-----------|-----------|------------|
| K- 07 30 02 99 | 15 | Rp 1/2   | T 1           | 116,0     | 130,0     | 20,0      | 73,0      | 27         |
| K- 07 30 03 01 | 20 | Rp 3/4   | T 1           | 116,0     | 136,0     | 23,0      | 80,0      | 32         |
| K- 07 30 03 03 | 25 | Rp 1     | T 1           | 133,0     | 148,5     | 28,5      | 90,0      | 41         |
| K- 07 30 03 05 | 32 | Rp 1 1/4 | T 1           | 133,0     | 153,5     | 36,5      | 90,0      | 50         |
| K- 07 30 03 07 | 40 | Rp 1 1/2 | T 1           | 137,0     | 173,0     | 37,0      | 105,0     | 55         |
| K- 07 30 03 09 | 50 | Rp 2     | T 1           | 161,0     | 196,5     | 47,5      | 115,0     | 71         |