


# K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Caractéristiques

|                                |   |
|--------------------------------|---|
| <b>Raccord électrique</b>      | For Pg 11P connector socket, acc. to ISO 4400 |
| <b>Indice de protection</b>    | IP65 (with connector socket fitted)           |
| <b>Description filetage</b>    | Rp thread acc. to ISO 7-1                     |
| <b>Boîtier, siège de vanne</b> | Brass   |
| <b>Pièces internes</b>         | Stainless steel                               |
| <b>Joint d'étanchéité</b>      | Perbunan (NBR)                                |

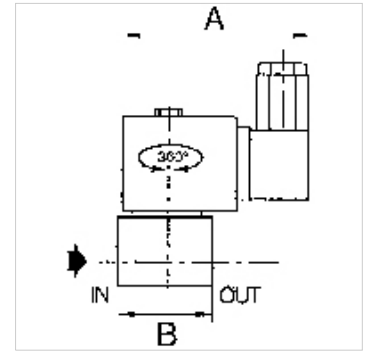

## Remarque

Autres informations sur demande.

## Description

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Article

| Désignation    | Filets | Pression de service max.<br>(bar) | VN  | A<br>(mm) | B<br>(mm) | Conception |
|----------------|--------|-----------------------------------|-----|-----------|-----------|------------|
| K- 07 30 22 52 | Rp 1/8 | 7                                 | 2,4 | 75,0      | 30,0      | 7          |
| K- 07 30 22 53 | Rp 1/4 | 6                                 | 3,2 | 80,0      | 43,0      | 10         |