



K-MV 3/2 24V DC

3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

HANSA FLEX

Caractéristiques

Raccord électrique	For Pg 11P connector socket, acc. to ISO 4400
Indice de protection	IP65 (with connector socket fitted)
Description filetage	Rp thread acc. to ISO 7-1
Boîtier, siège de vanne	Brass
Pièces internes	Stainless steel
Joint d'étanchéité	Perbunan (NBR)

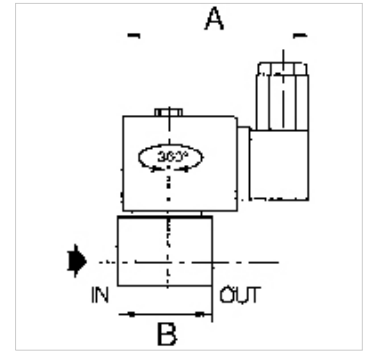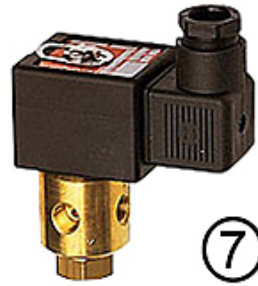

Remarque

Autres informations sur demande.

Description

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Article

Désignation	Filets	Pression de service max. (bar)	VN	A (mm)	B (mm)	Conception
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10