
K-MV 3/2 24V DC


3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

HANSA-FLEX

Caractéristiques

Raccord électrique	For Pg 11P connector socket, acc. to ISO 4400
Indice de protection	IP65 (with connector socket fitted)
Description filetage	Rp thread acc. to ISO 7-1
Boîtier, siège de vanne	Brass
Pièces internes	Stainless steel
Joint d'étanchéité	Perbunan (NBR)



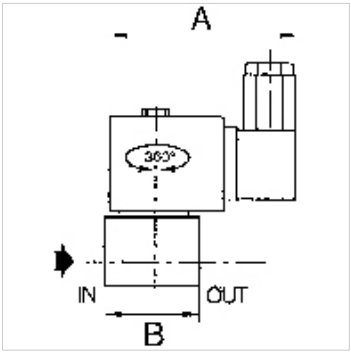

Remarque

Autres informations sur demande.

Description

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Article

Désignation	Filets	Pression de service max. (bar)	VN	A (mm)	B (mm)	Conception
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.