


K-MV G V 24 V DC

Normally closed, pilot-operated, 24 V DC (direct current)

HANSA FLEX

Caractéristiques

Raccord électrique	ISO 4400. cable socket (Pg 11P)
Indice de protection	IP65 (with connector socket fitted)
Température de fluide	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Description filetage	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Boîtier, siège de vanne	Brass
Pièces internes	Stainless steel
Joint d'étanchéité	Perbunan (NBR) or FKM

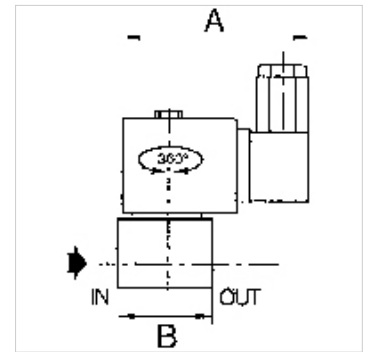

Remarque

Autres informations sur demande.

Description

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Article

Désignation	Filets	Pression de service max. (bar)	Pression de service mini (bar)	VN	Matériau étanche	A (mm)	B (mm)	Conception
K- 07 30 23 24	Rp 3/8	9	0,35	16,0	NBR	80,0	70,0	3
K- 07 30 23 30	Rp 3/8	9	0,35	16,0	FKM	80,0	70,0	3
K- 07 30 23 91	Rp 1/2	9	0,35	16,0	NBR	80,0	70,0	3
K- 07 30 23 31	Rp 1/2	9	0,35	16,0	FKM	80,0	70,0	3
K- 07 30 23 25	Rp 3/4	7	0,35	19,0	NBR	80,0	71,0	3
K- 07 30 23 32	Rp 3/4	7	0,35	19,0	FKM	80,0	71,0	3
K- 07 30 23 26	Rp 1	9	0,35	25,0	NBR	80,0	95,0	4
K- 07 30 23 33	Rp 1	9	0,35	25,0	FKM	80,0	95,0	4
K- 07 30 23 27	Rp 1 1/4	9	0,35	28,0	NBR	80,0	95,0	4
K- 07 30 23 34	Rp 1 1/4	9	0,35	28,0	FKM	80,0	95,0	4
K- 07 30 23 28	Rp 1 1/2	9	0,35	32,0	NBR	80,0	111,0	5
K- 07 30 23 35	Rp 1 1/2	9	0,35	32,0	FKM	80,0	111,0	5
K- 07 30 23 29	Rp 2	3	0,35	44,0	NBR	80,0	129,0	5