


# K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Caractéristiques

<b>Raccord électrique</b>	ISO 4400. cable socket (Pg 11P)
<b>Indice de protection</b>	IP65 (with connector socket fitted)
<b>Température de fluide</b>	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
<b>Description filetage</b>	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
<b>Boîtier, siège de vanne</b>	Brass
<b>Pièces internes</b>	Stainless steel
<b>Joint d'étanchéité</b>	Perbunan (NBR) or FKM

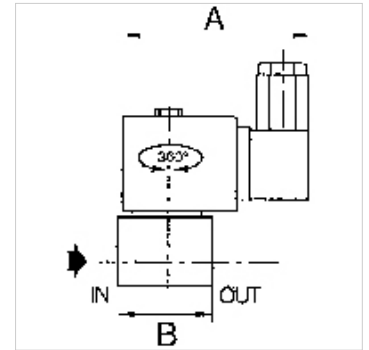

## Remarque

Autres informations sur demande.

## Description

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Article

Désignation	Filets	Pression de service max. (bar)	VN	Matériau étanche	A (mm)	B (mm)	Conception
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2