
K-NADELVENTILE VA
Needle valves

Caractéristiques

Pression de service	max. 400 bar (at 20 °C); max. 250 bar (at G 1 - 20 °C)
Température de service	-20 °C to +120 °C
Matériau étanche	PTFE
Boîtier	Stainless steel 1.4571
Volant	Plastic
Matériau	sealing: PTFE



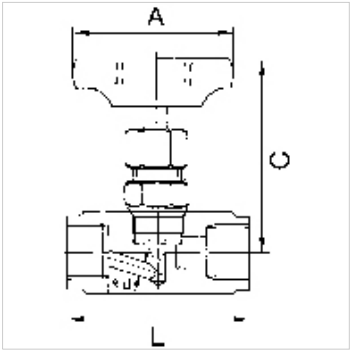

Remarque

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Autres informations sur demande.

Informations relatives à la commande

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Informations supplémentaires

Port sizes G 1 1/4, G 1 1/2 and G 2 available on request

Article

Désignation	DN	Filets	A (mm)	C (mm)	L (mm)
K- 07 30 24 03	4	G 1/8	50,0	74,0	50,0
K- 07 30 24 04	5	G 1/4	50,0	73,0	50,0
K- 07 30 24 05	6	G 3/8	50,0	72,0	55,0
K- 07 30 24 06	8	G 1/2	63,0	83,0	60,0
K- 07 30 24 07	10	G 3/4	63,0	100,0	75,0
K- 07 30 24 08	12	G 1	80,0	110,0	100,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.