# K-HOCHLEIST SICHERHEITSVEN


High-pressure safety valves

HANSA FLEX

## Caractéristiques

| | |
|---|---|
| **Application** | Compressed air and other non-toxic, neutral and non-flammable gases may escape freely. Not suitable for steam. |
| **Pression de service** | 0.5 - 20 bar |
| **Température de service** | max. 180 °C |
| **Logement de ressort** | Brass (up to G 1) / cast iron (powder coated blue G 1 1/4 or larger) |
| **Corps de vanne** | Brass |



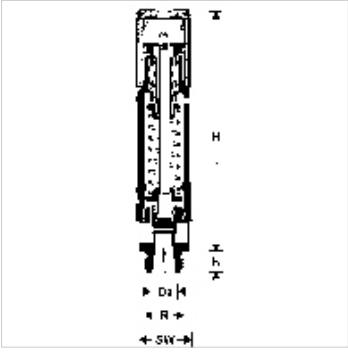


## Remarque

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Autres informations sur demande.

## Description

Proportional, spring-loaded safety valves with a lifting device. Type-tested acc. to VdTÜV Specification for safety valves 100. Exceptionally reliable, even when installed in extreme environments (vibration-resistant design).

## Informations supplémentaires

Important information: These valves are type-tested and are only allowed to be delivered with a fixed setting.

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 16 19** | G 1/2" | 0.5 bar | 10,0 | 138,0 | 53 - 786 Nm3/h | 27 |
| **K- 07 30 16 20** | G 1/2" | 0.6 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 21** | G 1/2" | 0.8 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 22** | G 1/2" | 0.9 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 23** | G 1/2" | 1.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 24** | G 1/2" | 1.1 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 25** | G 1/2" | 1.2 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 26** | G 1/2" | 1.3 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 27** | G 1/2" | 1.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 28** | G 1/2" | 1.6 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 29** | G 1/2" | 1.7 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 30** | G 1/2" | 1.8 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 52** | G 1/2" | 2.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 53** | G 1/2" | 2.1 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 54** | G 1/2" | 2.2 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 55** | G 1/2" | 2.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 56** | G 1/2" | 2.6 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 57** | G 1/2" | 2.7 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 58** | G 1/2" | 2.9 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 65** | G 1/2" | 3.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 66** | G 1/2" | 3.1 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 67** | G 1/2" | 3.2 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 68** | G 1/2" | 3.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 69** | G 1/2" | 3.9 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 71** | G 1/2" | 4.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 72** | G 1/2" | 4.3 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 73** | G 1/2" | 4.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 74** | G 1/2" | 5.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 75** | G 1/2" | 5.2 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 76** | G 1/2" | 5.3 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 77** | G 1/2" | 5.4 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 78** | G 1/2" | 5.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 79** | G 1/2" | 6.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 80** | G 1/2" | 6.3 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 81** | G 1/2" | 6.4 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 82** | G 1/2" | 6.5 bar | 10,0 | 138,0 | - | 27 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

HANSA FLEX

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 16 83** | G 1/2" | 6.6 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 84** | G 1/2" | 7.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 85** | G 1/2" | 7.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 86** | G 1/2" | 7.9 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 87** | G 1/2" | 8.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 88** | G 1/2" | 8.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 89** | G 1/2" | 9.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 90** | G 1/2" | 9.1 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 91** | G 1/2" | 9.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 31** | G 1/2" | 10.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 32** | G 1/2" | 10.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 33** | G 1/2" | 10.9 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 34** | G 1/2" | 11.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 35** | G 1/2" | 11.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 36** | G 1/2" | 11.7 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 37** | G 1/2" | 12.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 38** | G 1/2" | 12.5 bar | 10,0 | 138,0 | 53 - 786 Nm3/h | 27 |
| **K- 07 30 16 39** | G 1/2" | 13.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 40** | G 1/2" | 13.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 41** | G 1/2" | 14.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 42** | G 1/2" | 14.3 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 43** | G 1/2" | 14.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 44** | G 1/2" | 14.7 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 45** | G 1/2" | 15.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 46** | G 1/2" | 16.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 47** | G 1/2" | 16.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 48** | G 1/2" | 17.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 49** | G 1/2" | 18.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 50** | G 1/2" | 19.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 51** | G 1/2" | 19.8 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 59** | G 1/2" | 20.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 60** | G 1/2" | 21.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 61** | G 1/2" | 24.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 62** | G 1/2" | 24.5 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 63** | G 1/2" | 25.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 64** | G 1/2" | 26.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 70** | G 1/2" | 30.0 bar | 10,0 | 138,0 | - | 27 |
| **K- 07 30 16 92** | G 3/4" | 0.5 bar | 15,0 | 153,0 | 79 - 1172 Nm3/h | 36 |
| **K- 07 30 16 93** | G 3/4" | 0.6 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 94** | G 3/4" | 0.7 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 95** | G 3/4" | 0.8 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 96** | G 3/4" | 0.9 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 97** | G 3/4" | 1.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 98** | G 3/4" | 1.2 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 16 99** | G 3/4" | 1.3 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 00** | G 3/4" | 1.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 01** | G 3/4" | 1.6 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 24** | G 3/4" | 2.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 25** | G 3/4" | 2.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 26** | G 3/4" | 2.6 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 27** | G 3/4" | 2.7 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 32** | G 3/4" | 3.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 33** | G 3/4" | 3.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 35** | G 3/4" | 4.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 36** | G 3/4" | 4.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 37** | G 3/4" | 5.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 38** | G 3/4" | 6.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 39** | G 3/4" | 6.4 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 40** | G 3/4" | 6.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 41** | G 3/4" | 6.8 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 42** | G 3/4" | 7.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 43** | G 3/4" | 8.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 44** | G 3/4" | 8.3 bar | 15,0 | 153,0 | - | 36 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

HANSA FLEX

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 17 45** | G 3/4" | 8.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 46** | G 3/4" | 8.6 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 47** | G 3/4" | 8.8 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 48** | G 3/4" | 9.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 49** | G 3/4" | 9.3 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 50** | G 3/4" | 9.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 02** | G 3/4" | 10.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 03** | G 3/4" | 10.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 04** | G 3/4" | 10.6 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 05** | G 3/4" | 11.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 06** | G 3/4" | 11.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 07** | G 3/4" | 12.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 08** | G 3/4" | 12.5 bar | 15,0 | 153,0 | 79 - 1172 Nm3/h | 36 |
| **K- 07 30 17 09** | G 3/4" | 13.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 10** | G 3/4" | 14.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 11** | G 3/4" | 14.2 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 12** | G 3/4" | 14.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 13** | G 3/4" | 15.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 14** | G 3/4" | 15.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 15** | G 3/4" | 15.8 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 16** | G 3/4" | 16.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 17** | G 3/4" | 16.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 18** | G 3/4" | 17.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 19** | G 3/4" | 17.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 20** | G 3/4" | 18.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 21** | G 3/4" | 18.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 22** | G 3/4" | 19.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 23** | G 3/4" | 19.5 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 28** | G 3/4" | 20.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 29** | G 3/4" | 21.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 30** | G 3/4" | 22.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 31** | G 3/4" | 25.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 34** | G 3/4" | 30.0 bar | 15,0 | 153,0 | - | 36 |
| **K- 07 30 17 51** | G 1" | 0.5 bar | 20,0 | 185,0 | 213 - 3148 Nm3/h | 41 |
| **K- 07 30 17 52** | G 1" | 0.6 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 53** | G 1" | 0.7 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 54** | G 1" | 0.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 55** | G 1" | 0.9 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 56** | G 1" | 1.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 57** | G 1" | 1.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 58** | G 1" | 1.3 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 59** | G 1" | 1.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 60** | G 1" | 1.6 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 61** | G 1" | 1.7 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 62** | G 1" | 1.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 81** | G 1" | 2.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 82** | G 1" | 2.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 83** | G 1" | 2.3 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 84** | G 1" | 2.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 85** | G 1" | 2.7 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 86** | G 1" | 2.9 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 92** | G 1" | 3.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 93** | G 1" | 3.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 94** | G 1" | 3.4 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 95** | G 1" | 3.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 96** | G 1" | 3.9 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 98** | G 1" | 4.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 99** | G 1" | 4.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 00** | G 1" | 4.7 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 01** | G 1" | 5.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 02** | G 1" | 5.4 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 03** | G 1" | 5.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 04** | G 1" | 5.7 bar | 20,0 | 185,0 | - | 41 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

HANSA FLEX

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 18 05** | G 1" | 6.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 06** | G 1" | 6.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 07** | G 1" | 6.3 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 08** | G 1" | 6.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 09** | G 1" | 6.6 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 10** | G 1" | 6.9 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 11** | G 1" | 7.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 12** | G 1" | 7.2 bar | - | - | - | - |
| **K- 07 30 18 13** | G 1" | 7.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 14** | G 1" | 7.6 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 15** | G 1" | 7.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 16** | G 1" | 8.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 17** | G 1" | 8.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 18** | G 1" | 8.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 19** | G 1" | 8.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 20** | G 1" | 9.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 21** | G 1" | 9.2 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 22** | G 1" | 9.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 23** | G 1" | 9.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 63** | G 1" | 10.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 64** | G 1" | 10.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 65** | G 1" | 11.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 66** | G 1" | 11.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 67** | G 1" | 12.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 68** | G 1" | 12.5 bar | 20,0 | 185,0 | 213 - 3148 Nm3/h | 41 |
| **K- 07 30 17 69** | G 1" | 13.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 70** | G 1" | 13.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 71** | G 1" | 14.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 72** | G 1" | 14.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 73** | G 1" | 14.8 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 74** | G 1" | 15.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 75** | G 1" | 15.3 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 76** | G 1" | 15.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 77** | G 1" | 16.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 78** | G 1" | 16.5 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 79** | G 1" | 17.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 80** | G 1" | 18.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 87** | G 1" | 20.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 88** | G 1" | 21.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 89** | G 1" | 25.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 90** | G 1" | 27.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 91** | G 1" | 28.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 17 97** | G 1" | 30.0 bar | 20,0 | 185,0 | - | 41 |
| **K- 07 30 18 24** | G 1 1/4" | 0.5 bar | 25,0 | 231,0 | 334 - 4930 Nm3/h | 50 |
| **K- 07 30 18 25** | G 1 1/4" | 0.7 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 26** | G 1 1/4" | 0.9 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 27** | G 1 1/4" | 1.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 28** | G 1 1/4" | 1.2 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 29** | G 1 1/4" | 1.3 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 30** | G 1 1/4" | 1.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 31** | G 1 1/4" | 1.8 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 47** | G 1 1/4" | 2.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 48** | G 1 1/4" | 2.1 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 49** | G 1 1/4" | 2.2 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 50** | G 1 1/4" | 2.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 54** | G 1 1/4" | 3.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 55** | G 1 1/4" | 3.1 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 56** | G 1 1/4" | 5.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 57** | G 1 1/4" | 5.7 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 58** | G 1 1/4" | 6.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 59** | G 1 1/4" | 6.6 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 60** | G 1 1/4" | 6.8 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 61** | G 1 1/4" | 7.0 bar | 25,0 | 231,0 | - | 50 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

HANSA FLEX

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 18 62** | G 1 1/4" | 7.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 63** | G 1 1/4" | 7.7 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 64** | G 1 1/4" | 8.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 65** | G 1 1/4" | 8.2 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 66** | G 1 1/4" | 8.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 67** | G 1 1/4" | 8.8 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 68** | G 1 1/4" | 9.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 69** | G 1 1/4" | 9.3 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 32** | G 1 1/4" | 10.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 33** | G 1 1/4" | 10.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 34** | G 1 1/4" | 11.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 35** | G 1 1/4" | 11.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 36** | G 1 1/4" | 11.8 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 37** | G 1 1/4" | 12.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 38** | G 1 1/4" | 13.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 39** | G 1 1/4" | 13.2 bar | 25,0 | 231,0 | 334 - 4930 Nm3/h | 50 |
| **K- 07 30 18 40** | G 1 1/4" | 14.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 41** | G 1 1/4" | 14.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 42** | G 1 1/4" | 15.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 43** | G 1 1/4" | 16.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 44** | G 1 1/4" | 17.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 45** | G 1 1/4" | 17.5 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 46** | G 1 1/4" | 18.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 51** | G 1 1/4" | 20.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 52** | G 1 1/4" | 23.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 53** | G 1 1/4" | 25.0 bar | 25,0 | 231,0 | - | 50 |
| **K- 07 30 18 70** | G 1 1/2" | 0.5 bar | 32,0 | 293,0 | 546 - 8060 Nm3/h | 60 |
| **K- 07 30 18 71** | G 1 1/2" | 0.6 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 72** | G 1 1/2" | 0.8 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 73** | G 1 1/2" | 0.9 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 74** | G 1 1/2" | 1.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 75** | G 1 1/2" | 1.2 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 76** | G 1 1/2" | 1.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 87** | G 1 1/2" | 2.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 88** | G 1 1/2" | 2.1 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 89** | G 1 1/2" | 2.3 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 90** | G 1 1/2" | 2.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 91** | G 1 1/2" | 2.6 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 93** | G 1 1/2" | 3.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 94** | G 1 1/2" | 3.2 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 95** | G 1 1/2" | 3.3 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 96** | G 1 1/2" | 3.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 97** | G 1 1/2" | 3.7 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 98** | G 1 1/2" | 3.9 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 99** | G 1 1/2" | 4.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 00** | G 1 1/2" | 4.2 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 01** | G 1 1/2" | 4.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 02** | G 1 1/2" | 5.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 03** | G 1 1/2" | 5.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 04** | G 1 1/2" | 6.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 05** | G 1 1/2" | 6.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 06** | G 1 1/2" | 6.8 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 07** | G 1 1/2" | 7.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 08** | G 1 1/2" | 8.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 09** | G 1 1/2" | 8.2 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 10** | G 1 1/2" | 8.4 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 11** | G 1 1/2" | 8.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 12** | G 1 1/2" | 8.6 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 13** | G 1 1/2" | 8.8 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 14** | G 1 1/2" | 9.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 15** | G 1 1/2" | 9.3 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 16** | G 1 1/2" | 9.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 78** | G 1 1/2" | 10.0 bar | 32,0 | 293,0 | - | 60 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

HANSA FLEX

## Article

| Désignation | Filets | Pression de réponse | do (mm) | H (mm) | Puissance | SW (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 18 79** | G 1 1/2" | 10.4 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 80** | G 1 1/2" | 10.5 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 81** | G 1 1/2" | 11.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 82** | G 1 1/2" | 12.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 83** | G 1 1/2" | 15.0 bar | 32,0 | 293,0 | 546 - 8060 Nm3/h | 60 |
| **K- 07 30 18 84** | G 1 1/2" | 16.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 85** | G 1 1/2" | 17.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 86** | G 1 1/2" | 19.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 18 92** | G 1 1/2" | 20.0 bar | 32,0 | 293,0 | - | 60 |
| **K- 07 30 19 17** | G 2" | 0.5 bar | 40,0 | 367,0 | 855 - 12615 Nm3/h | 80 |
| **K- 07 30 19 18** | G 2" | 0.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 19** | G 2" | 0.9 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 20** | G 2" | 1.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 21** | G 2" | 1.3 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 22** | G 2" | 1.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 23** | G 2" | 1.6 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 24** | G 2" | 1.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 38** | G 2" | 2.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 39** | G 2" | 2.1 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 40** | G 2" | 2.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 41** | G 2" | 2.6 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 42** | G 2" | 2.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 44** | G 2" | 3.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 45** | G 2" | 3.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 46** | G 2" | 3.7 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 47** | G 2" | 3.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 48** | G 2" | 3.9 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 49** | G 2" | 4.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 50** | G 2" | 4.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 51** | G 2" | 4.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 52** | G 2" | 5.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 53** | G 2" | 5.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 54** | G 2" | 6.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 55** | G 2" | 6.4 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 56** | G 2" | 6.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 57** | G 2" | 7.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 58** | G 2" | 7.2 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 59** | G 2" | 7.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 60** | G 2" | 8.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 61** | G 2" | 8.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 62** | G 2" | 8.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 63** | G 2" | 9.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 64** | G 2" | 9.3 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 65** | G 2" | 9.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 66** | G 2" | 9.7 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 67** | G 2" | 9.8 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 25** | G 2" | 10.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 26** | G 2" | 10.2 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 27** | G 2" | 10.5 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 28** | G 2" | 11.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 29** | G 2" | 12.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 30** | G 2" | 13.0 bar | 40,0 | 367,0 | 855 - 12615 Nm3/h | 80 |
| **K- 07 30 19 31** | G 2" | 14.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 32** | G 2" | 15.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 33** | G 2" | 16.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 34** | G 2" | 17.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 35** | G 2" | 17.6 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 36** | G 2" | 18.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 37** | G 2" | 19.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 19 43** | G 2" | 20.0 bar | 40,0 | 367,0 | - | 80 |
| **K- 07 30 18 77** | G 1 1/2" | 1.8 bar | 32,0 | 293,0 | - | 60 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*