

K-T-TUE
Tee hose connectors

Caractéristiques

Pression de service	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Raccord fileté	Polyamide (PA)
Anneau de matrice	Polypropylene (PP)
Écrou	Polypropylene (PP)



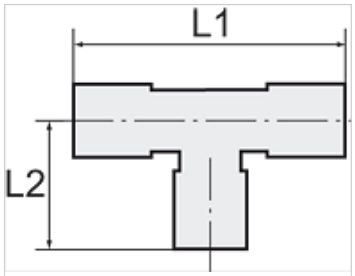

Remarque
Autres informations sur demande.

Description
Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Article

Désignation	pour tuyau	L1 (mm)	L2 (mm)
K- 07 40 32 70	4 mm / 6 mm	52,0	26,0
K- 07 40 32 71	6 mm / 8 mm	62,0	31,0
K- 07 40 32 72	8 mm / 10 mm	72,0	36,0
K- 07 40 32 73	9 mm / 12 mm	80,0	40,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.