


K-W90 VERSCHR HL

Union elbows, pipe connection on both sides

HANSA FLEX

Caractéristiques

| | |
|---------------------|----------------|
| Domaine de pression | Max. 60 bar |
| Température | Max. 150 °C |
| Matériau | Laiton nickelé |

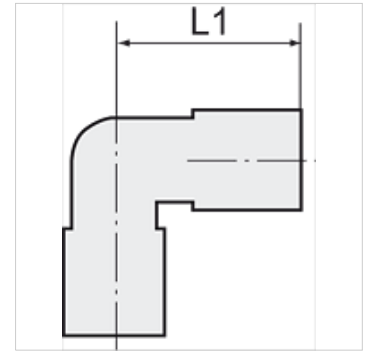

Remarque

Autres informations sur demande.

Article

| Désignation | Ø ext. de tube | L1 (mm) | SW | SW1 (mm) |
|----------------|----------------|------------|-------|-------------|
| K- 07 40 20 48 | 4 mm | 21,0 | 9 mm | 10 |
| K- 07 40 20 52 | 12 mm | 34,5 | 15 mm | 22 |
| K- 07 40 20 50 | 8 mm | 24,0 | 11 mm | 14 |
| K- 07 40 20 51 | 10 mm | 32,0 | 13 mm | 19 |
| K- 07 40 20 54 | 18 mm | 44,0 | 22 mm | 32 |
| K- 07 40 20 53 | 15 mm | 38,0 | 17 mm | 27 |
| K- 07 40 20 49 | 6 mm | 23,0 | 9 mm | 12 |