

K-VST 1 2

Plugs

Caractéristiques


Pression de service Max. 16 bar (at +20 °C)

Température de service -20 °C to +70 °C

Matériau Laiton nickelé

Joint torique NBR, siliconefree

Pince de serrage Stainless steel AISI 316

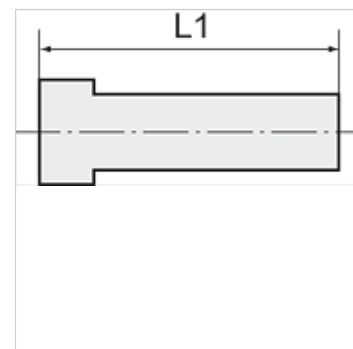

Remarque

Autres informations sur demande.

Description

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Article

Désignation	L1 (mm)	Manchons (mm)
K- 07 40 29 98	25,5	4
K- 07 40 29 99	27,5	6
K- 07 40 30 00	30,5	8
K- 07 40 30 01	35,0	10
K- 07 40 30 02	37,0	12