

# K-GAM IG 3

Female connectors, female thread



**HANSA FLEX**

## Caractéristiques

Pression de service Max. 18 bar

Matériau étanche Buna-N

Matériau Laiton nickelé

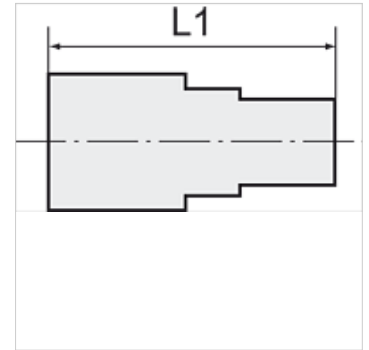

## Remarque

Autres informations sur demande.

## Article

| Désignation    | Filets | pour tuyau    | L1<br>(mm) | SW    |
|----------------|--------|---------------|------------|-------|
| K- 07 40 31 01 | G 1/8  | 6 mm / 4 mm   | 26,5       | 14 mm |
| K- 07 40 31 02 | G 1/8  | 8 mm / 6 mm   | 26,5       | 14 mm |
| K- 07 40 30 99 | G 1/4  | 6 mm / 4 mm   | 29,5       | 17 mm |
| K- 07 40 31 00 | G 1/4  | 8 mm / 6 mm   | 29,0       | 17 mm |
| K- 07 40 30 98 | G 1/4  | 10 mm / 8 mm  | 31,0       | 17 mm |
| K- 07 40 31 05 | G 3/8  | 6 mm / 4 mm   | 29,5       | 20 mm |
| K- 07 40 31 06 | G 3/8  | 8 mm / 6 mm   | 33,0       | 20 mm |
| K- 07 40 31 03 | G 3/8  | 10 mm / 8 mm  | 35,0       | 20 mm |
| K- 07 40 31 04 | G 3/8  | 12 mm / 10 mm | 32,5       | 20 mm |
| K- 07 40 30 97 | G 1/2  | 8 mm / 6 mm   | 33,0       | 24 mm |
| K- 07 40 30 96 | G 1/2  | 10 mm / 8 mm  | 38,0       | 24 mm |