

# K-XV AGM

Double nipples, parallel male thread

## Caractéristiques

| | |
|---|---|
| **Pression de service** | Max. 20 bar |
| **Matériau** | Acier inoxydable 1.4571 |



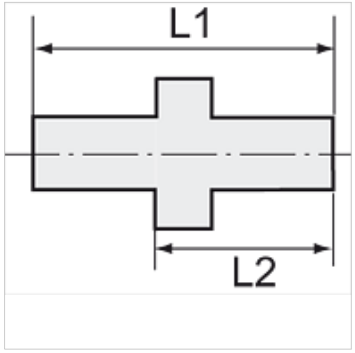


## Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

## Informations supplémentaires

Further types and dimensions on request.

## Article

| Désignation | Filetage 1 | Filetage 2 | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 11 98** | M 5 | M 5 | 13,0 | 8,0 | 7 mm |
| **K- 07 40 11 99** | M 5 | G 1/8 | 17,0 | 12,0 | 14 mm |
| **K- 07 40 12 00** | M 5 | G 1/4 | 21,0 | 14,0 | 17 mm |
| **K- 07 40 11 95** | G 1/8 | G 1/8 | 21,0 | 13,0 | 14 mm |
| **K- 07 40 11 97** | G 1/8 | G 1/4 | 22,0 | 14,0 | 17 mm |
| **K- 07 40 11 96** | G 1/8 | G 3/8 | 25,0 | 16,0 | 19 mm |
| **K- 07 40 12 01** | G 1/4 | G 1/4 | 23,0 | 14,0 | 17 mm |
| **K- 07 40 12 03** | G 1/4 | G 3/8 | 24,0 | 15,0 | 19 mm |
| **K- 07 40 12 02** | G 1/4 | G 1/2 | 27,0 | 18,0 | 24 mm |
| **K- 07 40 12 04** | G 3/8 | G 3/8 | 25,0 | 15,0 | 19 mm |
| **K- 07 40 12 06** | G 3/8 | G 1/2 | 27,0 | 17,0 | 24 mm |
| **K- 07 40 12 05** | G 3/8 | G 3/4 | 36,0 | 24,0 | 32 mm |
| **K- 07 40 12 07** | G 1/2 | G 1/2 | 29,0 | 17,0 | 24 mm |
| **K- 07 40 12 09** | G 1/2 | G 3/4 | 33,0 | 21,0 | 32 mm |
| **K- 07 40 12 08** | G 1/2 | G 1 | 40,0 | 24,0 | 36 mm |
| **K- 07 40 12 12** | G 3/4 | G 3/4 | 33,0 | 21,0 | 32 mm |
| **K- 07 40 12 10** | G 3/4 | G 1 | 40,0 | 24,0 | 36 mm |
| **K- 07 40 12 11** | G 1 | G 1 | 42,0 | 26,0 | 36 mm |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*