

K-MUFFEN SK MS NI

Sockets with outer hex - nickel-plated brass

Caractéristiques

Température de service	Max. 150 °C
Pression	Max. 60 bar
Matériau	Laiton nickelé



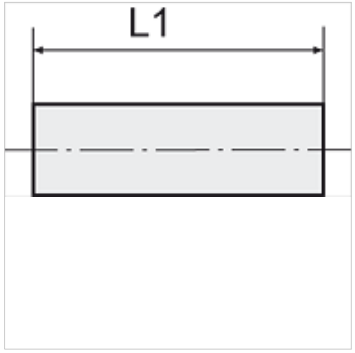

Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

Description

Suitable for air, water, oil, steam, etc.

Informations supplémentaires

Further types and dimensions on request.

Article

Désignation	Filets	L1 (mm)	SW
K- 07 40 15 06	M 5	11,0	8 mm
K- 07 40 15 07	G 1/8	15,0	14 mm
K- 07 40 15 08	G 1/4	22,0	17 mm
K- 07 40 15 09	G 3/8	24,0	22 mm
K- 07 40 15 11	G 1/2	30,0	27 mm
K- 07 40 15 10	G 3/4	32,0	32 mm
K- 07 40 15 12	G 1	35,0	38 mm

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.