

K-TR AG OR VALUE LINE MS NI

Male hose fittings, incl. NBR-O-ring, parallel male thread



HANSA FLEX

Caractéristiques

Pression de service maxi 60 bar

Température de service maxi 80 °C

Matériau Laiton nickelé

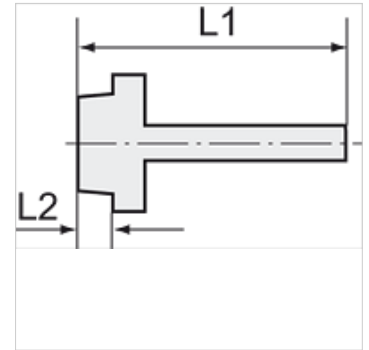

Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Autres informations sur demande.

Description

For air, water, steam, oil, etc.

Article

Désignation	Filets	pour tuyau	L1 (mm)	L2 (mm)	SW
K- 07 40 14 19	G 1/8	LW 6 mm	30,0	6,5	14 mm
K- 07 40 14 20	G 1/8	LW 8 mm	30,0	6,5	14 mm
K- 07 40 14 21	G 1/8	LW 9 mm	30,0	6,5	14 mm
K- 07 40 14 22	G 1/4	LW 6 mm	32,0	8,0	17 mm
K- 07 40 14 23	G 1/4	LW 9 mm	32,0	8,0	17 mm
K- 07 40 14 24	G 1/4	LW 12 mm	33,0	8,0	17 mm
K- 07 40 14 25	G 3/8	LW 9 mm	33,0	9,0	20 mm
K- 07 40 14 26	G 3/8	LW 12 mm	34,0	9,0	20 mm
K- 07 40 14 27	G 1/2	LW 12 mm	35,5	10,0	25 mm