



# K-VTL KUGELHAEHNE

Distributor block

**HANSA FLEX**

## Caractéristiques

Fixation	2 mounting holes in housing (screw size M 5)
Domaine de pression	Max. +10 bar, rough vacuum
Plage de température	-10 °C to +100 °C
Filetage robinet à boisseau sphérique	G 1/4
Boîtier	Die-cast aluminium
Sphère, broche	Ms 58, chrome-plated
Étanchéité par joint sphérique	PTFE
Joint torique	NBR

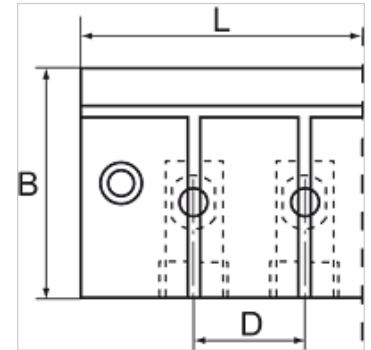

## Remarque

Autres informations sur demande.

## Description

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Article

Désignation	Nombre de robinets à boisseau sphérique	Filetage en sortie	Filetage en entrée	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0