


K-VTL KUGELHAEHNE

Distributor block

HANSA FLEX

Caractéristiques

Fixation	2 mounting holes in housing (screw size M 5)
Domaine de pression	Max. +10 bar, rough vacuum
Plage de température	-10 °C to +100 °C
Filetage robinet à boisseau sphérique	G 1/4
Boîtier	Die-cast aluminium
Sphère, broche	Ms 58, chrome-plated
Étanchéité par joint sphérique	PTFE
Joint torique	NBR

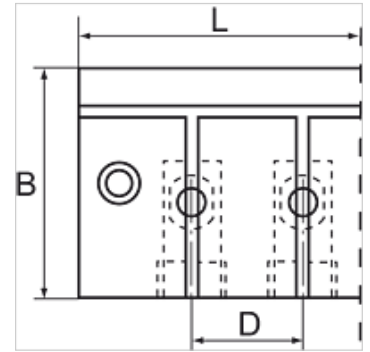

Remarque

Autres informations sur demande.

Description

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Article

Désignation	Nombre de robinets à boisseau sphérique	Filetage en sortie	Filetage en entrée	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0