
K-VTST 3 AB MS

Distributor pieces, brass, with 3 outlets

Caractéristiques

Raccord	G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing
Pression de service	maxi 10 bar



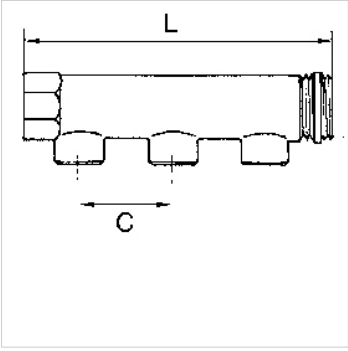

Remarque

Autres informations sur demande.

Description

For assembling compressed air taps.End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Article

Désignation	Raccord de sortie	Raccord d'entrée	C (mm)	L (mm)
K- 07 40 40 55	3 x 1/2 male	2 x 3/4	50,0	160,0
K- 07 40 40 56	3 x 1/2 female	2 x 3/4	50,0	160,0
K- 07 40 40 57	3 x 1/2 male	2 x 1	50,0	163,0
K- 07 40 40 58	3 x 1/2 female	2 x 1	50,0	163,0
K- 07 40 40 59	3 x 1/2 male	2 x 1 1/4	60,0	197,0
K- 07 40 40 60	3 x 1/2 female	2 x 1 1/4	60,0	197,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.