

K-DRGREDV
Pressure reducing valves

Caractéristiques

Pression d'entrée	Max. 15 bar
Raccord	G 1/4 internal / external
Matériau	Laiton



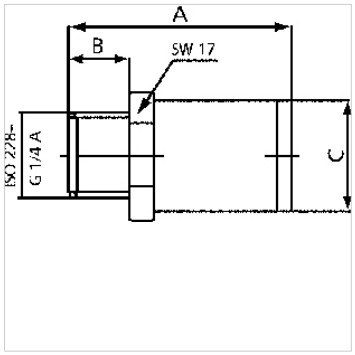

Remarque

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%
Autres informations sur demande.

Description

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set.
Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

Article

Désignation	Pression de réglage	Débit maxi (L/min)	A (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.