


Caractéristiques

Pression d'entrée	Max. 50 bar
Température de fluide	max. 80 °C
Température ambiante	Max. 80 °C
Largeur des pores de l'élément de filtre	50 µm
Matériau étanche	FKM
Matériau	stainless steel 1.4404 (AISI 316L)
Drain valve	Locking screw
Mesure de la valeur du débit	At P1 = 6 bar and pressure drop $\Delta p \leq 0.6$ bar

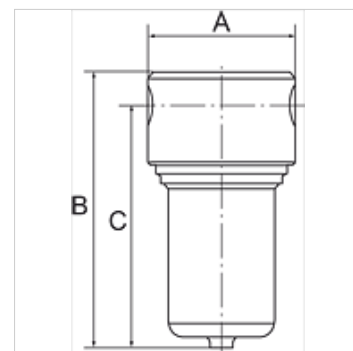

Remarque

Autres informations sur demande.

Description

Stainless steel filters containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Informations relatives à la commande

Important: This is not a sterile filter! With filter element 5 µm available on request. With manual or fully automatic drain valve on request. With NPT threads available on request.

Article

Désignation	Filets	Débit (L/min)	A (mm)	B	C (mm)
K- 07 25 05 59	G 1/4	2500	64,0	139,0 mm	125,0
K- 07 25 05 58	G 1/2	3400	80,0	150,0 mm	130,0

Accessoires

K-HALTERBAUSATZ Holder

Pièces de rechange

K-VERSCHLEI-SATZ Set of wearing parts