


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Caractéristiques

Pression d'entrée	Max. 30 bar
Température de fluide	max. 130 °C
Température ambiante	Max. 60 °C
Débit	2500 l/min
Largeur des pores de l'élément de filtre	50 µm
Matériau étanche	FKM
Membrane	PTFE on NBR base
Matériau	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Mesure de la valeur du débit	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

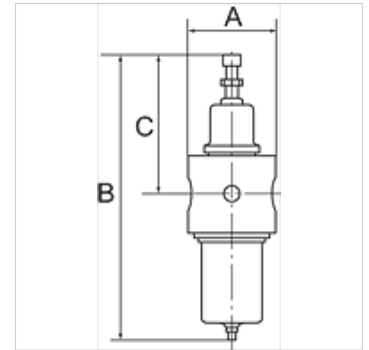

Remarque

Autres informations sur demande.

Description

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Informations relatives à la commande

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Article

Désignation	Filets	Plage de régulation	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Pièces de rechange

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts