


K-DRG DRVS HANSA

Pressure regulators with continuous pressure supply

HANSA FLEX

Caractéristiques

| | |
|------------------------------|---|
| Pression d'entrée | Max. 16 bar |
| Plage de température | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Filet de raccord | Material: Die-cast zinc |
| Boîtier | Material: Grivory® (PA 66) |
| Membrane | NBR |
| Consommation d'air interne | only G3/4, G1 Max. 1.5 l/min (depending on secondary pressure) |
| Mesure de la valeur du débit | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

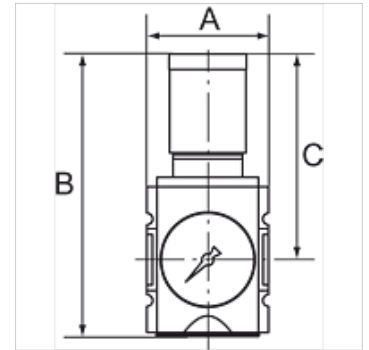

Remarque

Autres informations sur demande.

Description

Diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side. By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line. The regulator button can be latched and locked.

Informations relatives à la commande

The price does not include a key lock. Please order separately.

Article

| Désignation | Filets | Plage de régulation | Débit (L/min) | A (mm) | B | C (mm) | Gabarit |
|----------------|--------|---------------------|---------------|--------|----------|--------|---------|
| K- 07 25 02 51 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 52 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 53 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 54 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 55 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 56 | G 1/4 | 0.5 - 16 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 69 | G 3/8 | 0.1 - 1 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 70 | G 3/8 | 0.1 - 2 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 71 | G 3/8 | 0.2 - 4 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 72 | G 3/8 | 0.5 - 8 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 73 | G 3/8 | 0.5 - 10 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 74 | G 3/8 | 0.5 - 16 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 57 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 58 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 59 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 60 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 61 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 62 | G 3/8 | 0.5 - 16 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 63 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 64 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 65 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 66 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 67 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 68 | G 1/2 | 0.5 - 16 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |

Accessoires

K-STECKSCHLOSS Key lock

Pièces de rechange

| | |
|---------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |