


K-PRAEZI DRG MANO HANSA

Precision pressure regulators

HANSA FLEX

Caractéristiques

| | |
|------------------------------|---|
| Pression d'entrée | Max. 16 bar |
| Plage de température | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Filet de raccord | Material: Die-cast zinc |
| Boîtier | Material: Grivory® (PA 66) |
| Membrane | NBR |
| Consommation d'air interne | 2.6 l/min at P2 = 6 bar (depending on secondary pressure) |
| Mesure de la valeur du débit | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

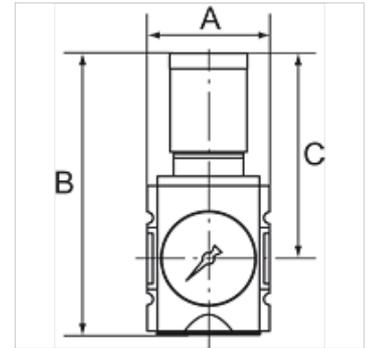

Remarque

Autres informations sur demande.

Description

Precision diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for applications requiring an extremely accurate working pressure. The regulator button can be latched and locked.

Informations relatives à la commande

The price does not include a key lock. Please order separately.

Article

| Désignation | Filets | Plage de régulation | Débit (L/min) | A (mm) | B | C (mm) | Gabarit |
|----------------|--------|---------------------|---------------|--------|----------|--------|---------|
| K- 07 25 09 46 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 47 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 48 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 49 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 50 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 51 | G 3/8 | 0.1 - 1 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 52 | G 3/8 | 0.1 - 2 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 53 | G 3/8 | 0.2 - 4 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 54 | G 3/8 | 0.5 - 8 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 55 | G 3/8 | 0.5 - 10 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 56 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 57 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 58 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 59 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 60 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 61 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 62 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 63 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 64 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 65 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |

Accessoires

K-STECKSCHLOSS Key lock

Pièces de rechange

| | |
|--------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |