


# K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

## Caractéristiques

|                              |   |
|------------------------------|---|
| Pression d'entrée            | 1.5 - 16 bar  |
| Pression en sortie           | 0.5 - 8 bar   |
| Plage de température         | -10 °C to +50 °C  |
| Médiums                      | Air comprimé  |
| Finesse du filtre            | 5,00 µm   |
| Filet de raccord             | Material: Die-cast zinc   |
| Réservoir                    | Polycarbonate (with bayonet lock)                                 |
| Élément de filtre            | Cellpor (PE)  |
| Boîtier                      | Material: Grivory® (PA 66)  |
| Membrane                     | NBR   |
| Panier de protection         | Polyamide   |
| Embout compte-goutte         | PA  |
| Consommation d'air interne   | Max. 1.5 l/min (depending on secondary pressure)                  |
| Mesure de la valeur du débit | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

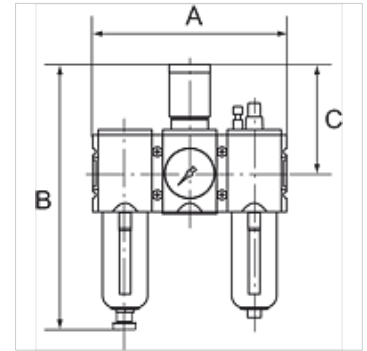

## Remarque

Autres informations sur demande.

## Description

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

## Informations relatives à la commande

The price does not include a key lock. Please order separately.

## Article

| Désignation    | Filets | Débit (L/min) | A (mm) | B        | C (mm) | Évacuation du condensat |
|----------------|--------|---------------|--------|----------|--------|-------------------------|
| K- 07 25 14 37 | G 1/4  | 1500          | 156,0  | 225,0 mm | 95,5   | Semi                    |
| K- 07 25 14 38 | G 3/8  | 1500          | 156,0  | 225,0 mm | 95,5   | Semi                    |
| K- 07 25 14 39 | G 3/8  | 3500          | 189,0  | 257,0 mm | 110,0  | Semi                    |
| K- 07 25 14 40 | G 1/2  | 3500          | 189,0  | 257,0 mm | 110,0  | Semi                    |
| K- 07 25 14 41 | G 3/4  | 12000         | 255,0  | 329,0 mm | 137,0  | Semi                    |
| K- 07 25 14 42 | G 1    | 12000         | 255,0  | 329,0 mm | 137,0  | Semi                    |
| K- 07 25 14 43 | G 1/4  | 1500          | 156,0  | 243,0 mm | 95,5   | Auto                    |
| K- 07 25 14 44 | G 3/8  | 1500          | 156,0  | 243,0 mm | 95,5   | Auto                    |
| K- 07 25 14 45 | G 3/8  | 3500          | 189,0  | 274,0 mm | 110,0  | Auto                    |
| K- 07 25 14 46 | G 1/2  | 3500          | 189,0  | 274,0 mm | 110,0  | Auto                    |
| K- 07 25 14 47 | G 3/4  | 12000         | 255,0  | 343,0 mm | 137,0  | Auto                    |
| K- 07 25 14 48 | G 1    | 12000         | 255,0  | 343,0 mm | 137,0  | Auto                    |

## Accessoires

K-STECKSCHLOSS Key lock

## Pièces de rechange

|                              |                               |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA        | Holder HANSA                  |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT              | Filter element                |
| K-TROPFAUFSATZ HANSA         | Drip attachment HANSA         |
| K-SCHALTTAFELMUTTER HANSA    | Nut HANSA                     |
| K-DICHTSATZ HANSA            | Set of seals HANSA            |