


# K-SCHALTVENTILE 3/2 MULTIFIX MINI

On-off valves (3/2-way valves)

**HANSA FLEX**

## Caractéristiques

Pression d'entrée	Min. 2 bar, max. 10 bar
Température de fluide	max. 60 °C
Température ambiante	Max. 60 °C
Raccord électrique	Device plug PG 9, type B, EN 175301-803
Indice de protection	IP 65 (P 54) acc. to DIN 40050
Débit	1600 l/min
Durée relative de mise en circuit	100 %
Raccord de ventilation	Silencer G 1/4
Matériau étanche	NBR
Boîtier	Die-cast zinc
Mesure de la valeur du débit	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

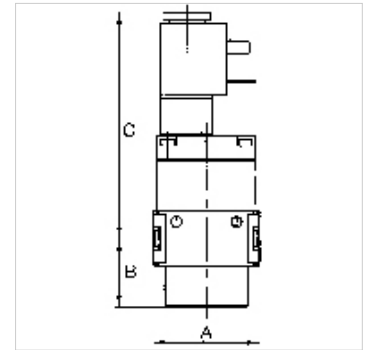

## Remarque

If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.

Autres informations sur demande.

## Description

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

## Article

Désignation	Filets	Bobine magnétique	A (mm)	B	C (mm)	Gabarit
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

## Pièces de rechange

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted