
# K-ANFAV VARIOBLOC
Manifolds

## Caractéristiques

| | |
|---|---|
| **Pression de service** | 2 - 25 bar |
| **Mesure de la valeur du débit** | At P1 = 6 bar and pressure drop Δp = 1 bar |



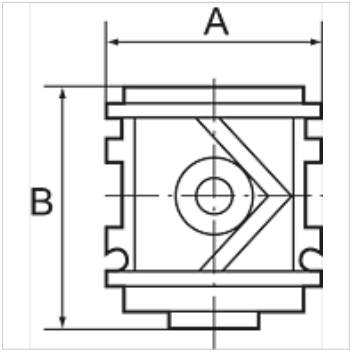


## Remarque

Autres informations sur demande.

## Description

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure. <br>The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

## Article

| Désignation | Filets | Débit (L/min) | A (mm) | B | Pression de service en bar |
|---|---|---|---|---|---|
| **K- 07 25 11 84** | G 1/4 | 1200 | 48,0 | 54,0 mm | 2 - 25 bar |
| **K- 07 25 11 85** | G 3/8 | 1400 | 48,0 | 54,0 mm | 2 - 25 bar |
| **K- 07 25 11 86** | G 1/2 | 3800 | 70,0 | 72,0 mm | 2 - 25 bar |
| **K- 07 25 11 87** | G 3/4 | 4200 | 70,0 | 72,0 mm | 2 - 25 bar |
| **K- 07 25 11 88** | G 1 | 4200 | 124,0 | 72,0 mm | 2 - 25 bar |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*