K-SCHALTVENTILE 3/2 VAROBLOC


On-off valves (3/2-way valves)

HANSA-FLEX

Caractéristiques

Indice de protection	IP 65 acc. to DIN 40050
Pression de service	3 to 10 bar
Mesure de la valeur du débit	At P1 = 6 bar and pressure drop Δp = 1 bar



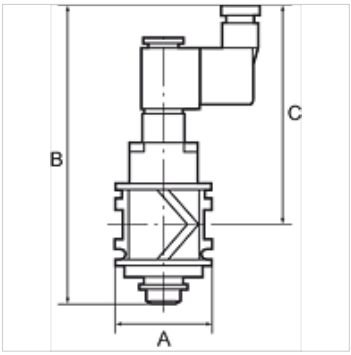

Remarque

Autres informations sur demande.

Description

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

Article

Désignation	Filets	Débit (L/min)	A (mm)	Raccord	B	C (mm)	Tension
K- 07 25 11 94	G 1/4	2200	48,0	Device plug PG 9, type B, EN 175301-803	147,0 mm	108,0	24 V DC
K- 07 25 11 95	G 3/8	2600	48,0	Device plug PG 9, type B, EN 175301-803	147,0 mm	108,0	24 V DC
K- 07 25 11 96	G 1/2	3300	70,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC
K- 07 25 11 97	G 3/4	3800	70,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC
K- 07 25 11 98	G 1	3800	124,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC

Pièces de rechange

K-MAGNETSPULE VARIOBLOC	Solenoid
K-GERAETESTECKER	Coupling socket

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.