K-RD GEW SCHL

Unidirectional valves, thread (input) - pipe (output)

Caractéristiques

Pression de service	0.5 - 12 bar
Débit 6,3 bar, p=1 bar	80 Nl/min (Ø 4), 320 Nl/min (Ø 6), 480 Nl/min (Ø 8)
Plage de température	-20 °C to +60 °C
Corps	Technopolymer
Pièces internes	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Matériau étanche	NBR
Montage	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Symbole	on the housing



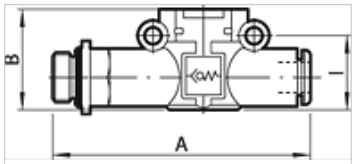

Remarque

Autres informations sur demande.

Description

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Article

Désignation	Filets	pour Ø de tuyau (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 34	M 5	4	47,7	17,5	12,8
K- 07 15 25 35	G 1/8	4	50,6	17,5	12,8
K- 07 15 16 59	G 1/8	6	58,3	20,0	14,6
K- 07 15 16 60	G 1/8	8	66,4	26,0	18,7
K- 07 15 16 57	G 1/4	6	61,3	20,0	14,6
K- 07 15 16 58	G 1/4	8	70,8	26,0	18,7
K- 07 15 16 61	G 3/8	8	72,4	26,0	18,7

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.