



K-SNV ENTLUE V SCHA SCHL SCHL

Quick-exhaust valves, with silencer, pipe - pipe

HANSA FLEX

Caractéristiques

Pression de service	1 - 10 bar
Débit 6,3 bar	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
Débit Ventilation 6,3 bar	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
Plage de température	-20 °C to +60 °C
Corps	Technopolymer
Pièces internes	nickel-plated brass, brass, lntechnopolymer, stainless steel
Matériau étanche	NBR
Montage	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Symbole	on the housing

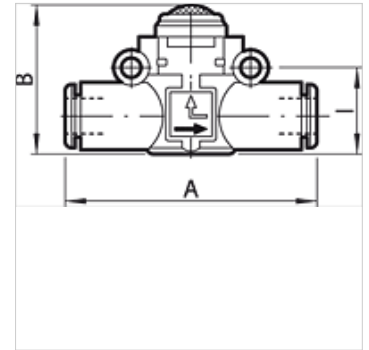

Remarque

Autres informations sur demande.

Description

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Article

Désignation	pour Ø de tuyau (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 28	4	41,8	19,8	12,8
K- 07 15 20 32	6	49,0	25,5	14,6
K- 07 15 20 33	8	57,2	31,5	18,7