


K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Caractéristiques

Médiums	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Pression de service	maxi 10 bar
Pression de réponse	0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)
Plage de température	-10 °C to +80 °C
Tige de piston	C45 steel, hard chrome-plated
Tube	Aluminium alloy, anodised
Diamètre de la tête	Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium
Pistons	Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/PTFE
Joint d'étanchéité de tige de piston	NBR (additional charge for PU and FKM)
Joint de piston	NBR (additional charge for PU and FKM)

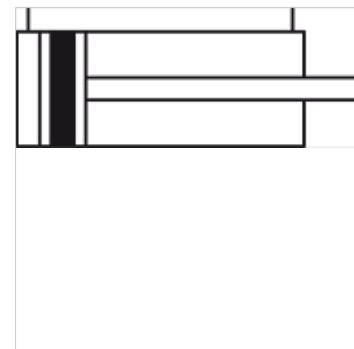

Remarque

Autres informations sur demande.

Description

Suitable for installation in limited spaces, with magnet.

Informations supplémentaires

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Filetage entrée tige de piston
K- 07 15 11 31	12 mm	5	M 5	M 3
K- 07 15 11 32	12 mm	10	M 5	M 3
K- 07 15 11 33	12 mm	25	M 5	M 3
K- 07 15 11 34	12 mm	30	M 5	M 3
K- 07 15 11 35	12 mm	40	M 5	M 3
K- 07 15 11 36	16 mm	5	M 5	M 5
K- 07 15 11 37	16 mm	10	M 5	M 5
K- 07 15 11 38	16 mm	25	M 5	M 5
K- 07 15 11 39	16 mm	30	M 5	M 5
K- 07 15 11 40	16 mm	40	M 5	M 5
K- 07 15 11 41	20 mm	5	M 5	M 5
K- 07 15 11 42	20 mm	10	M 5	M 5
K- 07 15 11 43	20 mm	25	M 5	M 5
K- 07 15 11 44	20 mm	30	M 5	M 5
K- 07 15 11 45	20 mm	40	M 5	M 5
K- 07 15 11 46	20 mm	50	M 5	M 5
K- 07 15 11 47	25 mm	5	G 1/8	M 5
K- 07 15 11 48	25 mm	10	G 1/8	M 5
K- 07 15 11 49	25 mm	25	G 1/8	M 5
K- 07 15 11 50	25 mm	30	G 1/8	M 5
K- 07 15 11 51	25 mm	40	G 1/8	M 5
K- 07 15 11 52	25 mm	50	G 1/8	M 5
K- 07 15 11 53	32 mm	5	G 1/8	M 6
K- 07 15 11 54	32 mm	10	G 1/8	M 6
K- 07 15 11 55	32 mm	25	G 1/8	M 6
K- 07 15 11 56	32 mm	30	G 1/8	M 6
K- 07 15 11 57	32 mm	40	G 1/8	M 6
K- 07 15 11 58	32 mm	50	G 1/8	M 6
K- 07 15 11 59	40 mm	5	G 1/8	M 6
K- 07 15 11 60	40 mm	10	G 1/8	M 6
K- 07 15 11 61	40 mm	25	G 1/8	M 6
K- 07 15 11 62	40 mm	30	G 1/8	M 6



En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.

25.08.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Filetage entrée tige de piston
K- 07 15 11 63	40 mm	40	G 1/8	M 6
K- 07 15 11 64	40 mm	50	G 1/8	M 6
K- 07 15 11 65	50 mm	5	G 1/8	M 8
K- 07 15 11 66	50 mm	10	G 1/8	M 8
K- 07 15 11 67	50 mm	25	G 1/8	M 8
K- 07 15 11 68	50 mm	30	G 1/8	M 8
K- 07 15 11 69	50 mm	40	G 1/8	M 8
K- 07 15 11 70	50 mm	50	G 1/8	M 8
K- 07 15 11 71	50 mm	70	G 1/8	M 8
K- 07 15 11 72	63 mm	5	G 1/8	M 8
K- 07 15 11 73	63 mm	10	G 1/8	M 8
K- 07 15 11 74	63 mm	25	G 1/8	M 8
K- 07 15 11 75	63 mm	30	G 1/8	M 8
K- 07 15 11 76	63 mm	40	G 1/8	M 8
K- 07 15 11 77	63 mm	50	G 1/8	M 8
K- 07 15 11 78	63 mm	70	G 1/8	M 8
K- 07 15 11 79	80 mm	5	G 1/4	M 10
K- 07 15 11 80	80 mm	10	G 1/4	M 10
K- 07 15 11 81	80 mm	25	G 1/4	M 10
K- 07 15 11 82	80 mm	30	G 1/4	M 10
K- 07 15 11 83	80 mm	40	G 1/4	M 10
K- 07 15 11 84	80 mm	50	G 1/4	M 10
K- 07 15 11 85	80 mm	70	G 1/4	M 10
K- 07 15 11 86	80 mm	100	G 1/4	M 10

Accessoires

K-MAGNETSENSOREN-REED Reed magnetic sensor (incl. 2.5 m cable)