


# K-NORMZYLINDER

Standard cylinders

**HANSA FLEX**

## Caractéristiques

Médiums	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Pression de service	Max. 10 bar
Pression de réponse	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Plage de température	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Montage	Heads / jacket with self-tapping screws
Tige de piston	C45 steel, hard chrome-plated
Tube	Anodised aluminium jacket with integrated T-slots
Pistons	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Matériau étanche	NBR

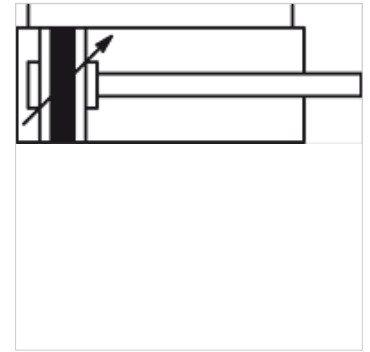

## Remarque

Autres informations sur demande.

## Description

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply. <br>Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides. <br>The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

## Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Ø tige de piston (mm)	Filetage extérieur-tiges de piston
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5



En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.

22.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-NORMZYLINDER

Standard cylinders

**HANSA FLEX**

## Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Ø tige de piston (mm)	Filetage extérieur-tiges de piston
K- 07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

## Accessoires

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model
K-FRONT ODER BODENFLANSCH	Flange model



En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.

22.07.2024

HANSA-FLEX AG

www.hansa-flex.com

