# K-RUNDZYLINDER DOPP O D


Miniature cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

## Caractéristiques

| | |
|---|---|
| **Médiums** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Pression de service** | Max. 10 bar |
| **Pression de réponse** | 0,8 bar (Ø 8 bis Ø 12), 0,6 bar (Ø 16 bis Ø 25) |
| **Plage de température** | -10 °C to +80 °C |
| **Montage** | Flanged joint between stainless steel barrel and heads |
| **Tige de piston** | C45 steel, hard chrome-plated |
| **Tube** | Stainless steel 1.4301 |
| **Pistons** | Synthetic (acetal) resin |
| **Matériau étanche** | NBR |



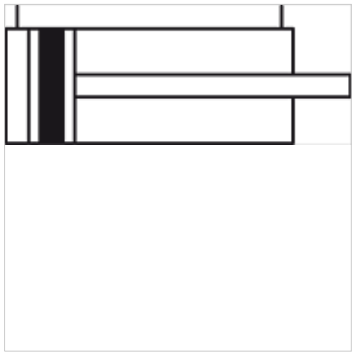

## Remarque

Maximum recommended stroke: Double-acting: Ø 8 - Ø 10 = 100 stroke, Ø 12 - Ø 16 = 200 stroke, Ø 20 - Ø 25 = 250 stroke
Single-acting: Ø 8 - Ø 25 = 50 stroke. Longer stroke lengths can cause operational malfunctions.
Autres informations sur demande.

## Description

Single and double-acting cylinders, with magnetic piston.

## Informations supplémentaires

Important: The scope of supply does not include a connector. Please order separately.

## Article

| Désignation | Ø pistons | Chariot élévateur (mm) | Raccord | Filetage tige de piston |
|---|---|---|---|---|
| **K- 07 15 16 67** | 8 mm | 10 | M 5 | M 4 |
| **K- 07 15 16 68** | 8 mm | 25 | M 5 | M 4 |
| **K- 07 15 16 69** | 8 mm | 50 | M 5 | M 4 |
| **K- 07 15 16 70** | 8 mm | 80 | M 5 | M 4 |
| **K- 07 15 16 71** | 8 mm | 100 | M 5 | M 4 |
| **K- 07 15 16 72** | 10 mm | 10 | M 5 | M 4 |
| **K- 07 15 16 73** | 10 mm | 25 | M 5 | M 4 |
| **K- 07 15 16 74** | 10 mm | 50 | M 5 | M 4 |
| **K- 07 15 16 75** | 10 mm | 80 | M 5 | M 4 |
| **K- 07 15 16 76** | 10 mm | 100 | M 5 | M 4 |
| **K- 07 15 16 77** | 12 mm | 10 | M 5 | M 6 |
| **K- 07 15 16 78** | 12 mm | 25 | M 5 | M 6 |
| **K- 07 15 16 79** | 12 mm | 50 | M 5 | M 6 |
| **K- 07 15 16 80** | 12 mm | 80 | M 5 | M 6 |
| **K- 07 15 16 81** | 12 mm | 100 | M 5 | M 6 |
| **K- 07 15 16 82** | 12 mm | 125 | M 5 | M 6 |
| **K- 07 15 16 83** | 12 mm | 160 | M 5 | M 6 |
| **K- 07 15 16 84** | 12 mm | 200 | M 5 | M 6 |
| **K- 07 15 16 85** | 16 mm | 10 | M 5 | M 6 |
| **K- 07 15 16 86** | 16 mm | 25 | M 5 | M 6 |
| **K- 07 15 16 87** | 16 mm | 50 | M 5 | M 6 |
| **K- 07 15 16 88** | 16 mm | 80 | M 5 | M 6 |
| **K- 07 15 16 89** | 16 mm | 100 | M 5 | M 6 |
| **K- 07 15 16 90** | 16 mm | 125 | M 5 | M 6 |
| **K- 07 15 16 91** | 16 mm | 160 | M 5 | M 6 |
| **K- 07 15 16 92** | 16 mm | 200 | M 5 | M 6 |
| **K- 07 15 16 93** | 20 mm | 10 | G 1/8 | M 8 |
| **K- 07 15 16 94** | 20 mm | 25 | G 1/8 | M 8 |
| **K- 07 15 16 95** | 20 mm | 50 | G 1/8 | M 8 |
| **K- 07 15 16 96** | 20 mm | 80 | G 1/8 | M 8 |
| **K- 07 15 16 97** | 20 mm | 100 | G 1/8 | M 8 |
| **K- 07 15 16 98** | 20 mm | 125 | G 1/8 | M 8 |
| **K- 07 15 16 99** | 20 mm | 160 | G 1/8 | M 8 |
| **K- 07 15 17 00** | 20 mm | 200 | G 1/8 | M 8 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*

# K-RUNDZYLINDER DOPP O D

Miniature cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

## Article

| Désignation | Ø pistons | Chariot élévateur (mm) | Raccord | Filetage tige de piston |
|---|---|---|---|---|
| **K- 07 15 17 01** | 20 mm | 250 | G 1/8 | M 8 |
| **K- 07 15 17 02** | 25 mm | 10 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 03** | 25 mm | 25 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 04** | 25 mm | 50 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 05** | 25 mm | 80 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 06** | 25 mm | 100 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 07** | 25 mm | 125 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 08** | 25 mm | 160 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 09** | 25 mm | 200 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 10** | 25 mm | 250 | G 1/8 | M 10 x 1.25 |

## Accessoires

| | |
|---|---|
| **K-FUSSBEFESTIGUNG 5** | Foot model |
| **K-FLANSCHBEFESTIGUNGEN1** | Flange model |
| **K-KOPFMUTTER DECKEL BODEN 2** | Hexagon nut (for head) |
| **K-GABELKOEPFE 3** | Fork model |
| **K-GELENKAUGEN 2** | Rod eye model |
| **K-SCHWENKLAGER 1** | Counter-hinge model |
| **K-SENSORHALTER** | Sensor support (with T-slot adapter) |
| **K-SENSOREN T-NUT 1** | Sensor for T-slot |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*