
K-STOPPVENTILE IG

Stop valves, ports 2 and 3 with female thread

Caractéristiques

Pression de service	Max. 10 bar
Pression de commande	1 - 5 bar, depending on operating pressure
Température de fluide	max. 70 °C
Position de montage	Any. Ring pieces can still be rotated 360° after the valve has been tightened
Matériau	Laiton nickelé
Matériau étanche	Perbunan



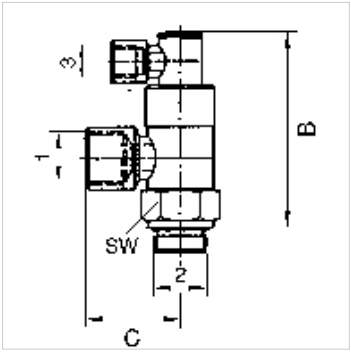

Remarque

Autres informations sur demande.

Description

For high-speed positioning and stop functions as well as emergency switching (e.g. emergency stop). If a control signal is present at port 3, air can flow to and from the cylinder. If no control signal is present, the air flow to and from the cylinder is shut off, causing the cylinder to stop in the required position. Stop valves are screwed directly onto the cylinder instead of the normal pipe connections.

Article

Désignation	Port 1	Port 2	Raccord 3	B (mm)	C (mm)
K- 07 15 20 46	G 1/8	G 1/8	G 1/8	52,0	21,0
K- 07 15 20 45	G 1/4	G 1/4	G 1/8	58,0	25,0
K- 07 15 20 47	G 3/8	G 3/8	G 1/8	63,0	31,0
K- 07 15 20 44	G 1/2	G 1/2	G 1/8	72,0	40,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.