
K-VHR IS BUND

Hexagon socket screw plugs with collar

Caractéristiques

Pression de service	10 bar
Température de fluide	max. +90 °C
Température ambiante	Max. +90 °C
Construction	Vis de fermeture à six pans creux
Matériau	Brass with a bare metal surface



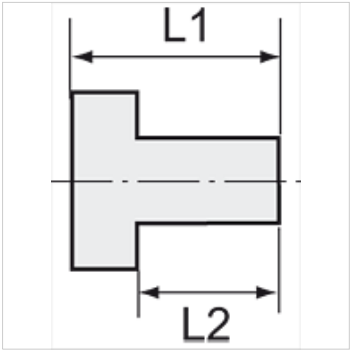

Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

Informations supplémentaires

Further types and dimensions on request.

Article

Désignation	Filets	L1 (mm)	L2 (mm)	SW
K- 07 40 10 22	G 1/8	11,0	8,0	5 mm
K- 07 40 10 23	G 1/4	13,0	10,0	6 mm
K- 07 40 10 24	G 3/8	15,0	12,0	8 mm
K- 07 40 10 25	G 1/2	18,0	14,0	10 mm
K- 07 40 45 21	G 3/4	24,0	20,0	12 mm
K- 07 40 45 24	G 1	27,0	22,0	17 mm

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.