

# K-VHR 6KT BUND

Hexagon head screw plugs with collar

## Caractéristiques

| | |
|---|---|
| **Pression de service** | 10 bar |
| **Température de fluide** | max. +90 °C |
| **Température ambiante** | Max. +90 °C |
| **Construction** | Vis de fermeture à six pans extérieurs |
| **Matériau** | Brass with a bare metal surface |



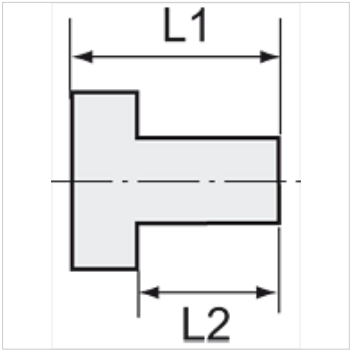


## Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

## Informations supplémentaires

Further types and dimensions on request.

## Article

| Désignation | Filets | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 44 47** | G 1/8 | 17,0 | 8,0 | 10 mm |
| **K- 07 40 44 49** | G 1/4 | 21,0 | 12,0 | 13 mm |
| **K- 07 40 44 51** | G 3/8 | 21,0 | 12,0 | 17 mm |
| **K- 07 40 44 53** | G 1/2 | 26,0 | 14,0 | 19 mm |
| **K- 07 40 44 55** | G 3/4 | 30,0 | 16,0 | 24 mm |
| **K- 07 40 44 57** | G 1 | 32,0 | 16,0 | 27 mm |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*