

K-VHRO IS OR MS NI

Hexagon socket screw plugs with O-ring


Caractéristiques

Température de service Max. 80 °C (with O-ring, NBR)

Pression Max. 60 bar

Construction Vis de fermeture à six pans creux

Matériau Laiton nickelé

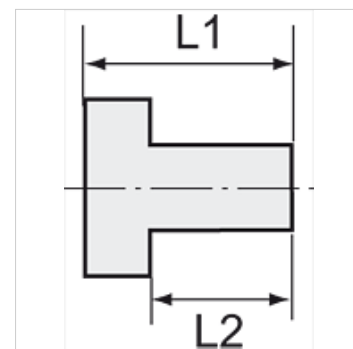

Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

Description

Suitable for air, water, oil, steam, etc.

Informations supplémentaires

Further types and dimensions on request.

Article

Désignation	Filets	six pans creux (mm)	L1 (mm)	L2 (mm)
K- 07 40 39 91	M 5	2,5	6,5	4,0
K- 07 40 39 92	G 1/8	3,0	9,5	7,0
K- 07 40 39 93	G 1/4	6,0	11,0	8,0
K- 07 40 39 94	G 3/8	8,0	12,5	9,0
K- 07 40 39 95	G 1/2	10,0	14,5	11,0
K- 07 40 44 09	G 3/4	17,0	20,0	15,5
K- 07 40 44 10	G 1	19,0	21,0	16,0