

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Caractéristiques

Plage de température -20 °C to +60 °C

Pression Max. 12 bar



Domaine de pression Max. 12 bar

Température -20 °C to +60 °C

Débit 0 - 400 l/min

Ressort Stainless-steel

Boîtier Brass

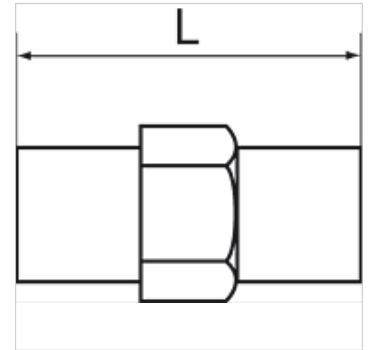

Remarque

Autres informations sur demande.

Description

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Article

| Désignation | Filets | Pression de service préconfigurée | L (mm) |
|----------------|------------------|-----------------------------------|-----------|
| K- 07 25 03 03 | G 1/4 außen/male | 2 bar | 24,0 |
| K- 07 25 03 04 | G 1/4 außen/male | 4 bar | 24,0 |
| K- 07 25 03 05 | G 1/4 außen/male | 6 bar | 24,0 |