


K-WTST SAFETY BK SCHA AN FILR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator

HANSA FLEX

Caractéristiques

| | |
|--|---|
| Pression d'entrée | 2.5 - 16 bar |
| Pression en sortie | 0.5 - 8 bar |
| Plage de température | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Matériau étanche | NBR |
| Filet de raccord | Material: Die-cast zinc |
| Réservoir | Polycarbonate (with bayonet lock) and bowl guard |
| Élément de filtre | Cellpor (PE) 5 µm |
| Boîtier | Material: Grivory® (PA 66) |
| Membrane | NBR |
| Consommation d'air interne | Max. 1.5 l/min (depending on secondary pressure) |
| Mesure de la valeur du débit | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Raccord ventilation Robinet à bords sphériques | Silencer |

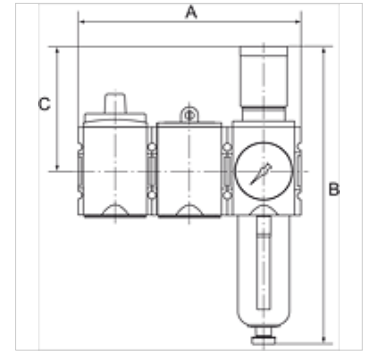

Remarque

Autres informations sur demande.

Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Informations relatives à la commande

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

Article

| Désignation | Filets | Débit (L/min) | A (mm) | B | C (mm) | Évacuation du condensat |
|----------------|--------|---------------|--------|----------|--------|-------------------------|
| K- 07 25 15 26 | G 1/4 | 2000 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 15 27 | G 3/8 | 2000 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 15 28 | G 3/8 | 4300 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 15 29 | G 1/2 | 4300 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 15 30 | G 3/4 | 10000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 15 31 | G 1 | 10000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 15 32 | G 1/4 | 2000 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 15 33 | G 3/8 | 2000 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 15 34 | G 3/8 | 4300 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 15 35 | G 1/2 | 4300 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 15 36 | G 3/4 | 10000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 15 37 | G 1 | 10000 | 255,0 | 343,0 mm | 137,0 | Auto |

Accessoires

| | |
|--------------------|----------|
| K-STECKSCHLOSS | Key lock |
| K-VORHAENGESCHLOSS | Padlock |