


# K-DRG WASSER NIEDRIGER HINTERDRUCK

Pressure regulators for water, low outlet pressure (max. 2 bar)

**HANSA FLEX**

## Caractéristiques

<b>Pression d'entrée</b>	Max. 16 bar (low-pressure type), Max. 25 bar (high-pressure type)
<b>Pré-pressurisation</b>	Min. 1.2 bar (low-pressure type), Max. 2.5 bar (high-pressure type)
<b>Chute de pression mini</b>	1 bar
<b>Température de service</b>	Max. 75 °C
<b>Joints</b>	NBR-SBR
<b>Logement de ressort</b>	Plastic PA 6 (up to DN 32, low-pressure type), Hot-pressed brass (up to DN 32, high-pressure type), Cast iron (from DN 40)
<b>Boîtier</b>	Bronze (Rg5)
<b>Pièces internes</b>	Plastic, brass, stainless steel

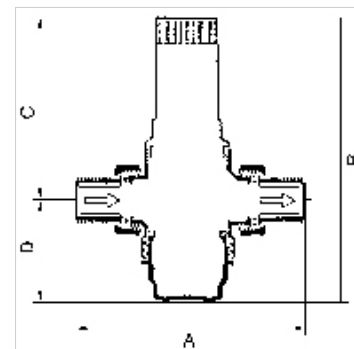

## Remarque

Autres informations sur demande.

## Description

Pressure regulator with pressure-reduced single-seated piston valve or single-seated diaphragm valve and built-in strainer. Specially designed for use with water. <br>The device is also suitable for all other applications involving neutral non-sticky liquids, air and neutral non-flammable gases.

## Article

Désignation	Filets	DN	Plage de régulation	Débit valeur kvs (m3/h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 51	R 1/2	15	0.2 - 2 bar	2,9	137,0	154,0 mm	127,0	27,0
K- 07 25 04 52	R 3/4	20	0.2 - 2 bar	3,9	141,0	154,0 mm	127,0	27,0
K- 07 25 04 53	R 1	25	0.2 - 2 bar	5,4	160,6	154,0 mm	126,0	28,5
K- 07 25 04 54	R 1 1/4	32	0.2 - 2 bar	6,1	177,2	156,0 mm	109,0	47,0
K- 07 25 04 55	R 1 1/2	40	0.2 - 2 bar	12,0	210,0	359,0 mm	300,0	59,0
K- 07 25 04 56	R 2	50	0.2 - 2 bar	13,0	210,0	361,0 mm	300,0	61,0

## Pièces de rechange

K-DICHTSAETZE DRUCKREGLER Seal kits Pressure regulators for drinking water, DVGW-tested acc. to EN 1567 and for water and liquid