
K-TR AG-K


Male hose fittings with conical male thread

HANSA-FLEX

Caractéristiques

Pression de service	Max. 20 bar
Matériau	Acier inoxydable 1.4571



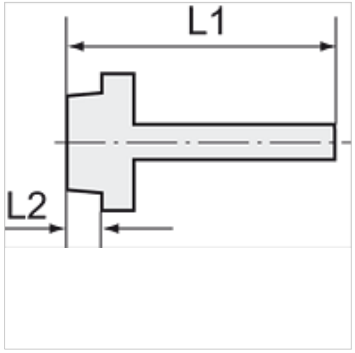

Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Autres informations sur demande.

Informations supplémentaires

Further types and dimensions on request.

Article

Désignation	Filets	pour tuyau	L1 (mm)	L2 (mm)	SW
K- 07 40 49 22	R 1/4	LW 9 mm	39,7	9,7	17 mm
K- 07 40 49 31	R 3/8	LW 9 mm	40,1	10,1	19 mm
K- 07 40 49 34	R 3/8	LW 13 mm	43,1	10,1	19 mm
K- 07 40 49 45	R 1/2	LW 13 mm	47,2	13,2	24 mm
K- 07 40 49 46	R 1/2	LW 19 mm	55,2	13,2	24 mm
K- 07 40 49 52	R 3/4	LW 19 mm	56,2	14,5	32 mm
K- 07 40 49 59	R 1	LW 25 mm	58,8	16,8	38 mm

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.