


K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials

HANSA FLEX

Caractéristiques

Médiums	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Pression de service	1 - 10 bar
Plage de température	-20 °C to +80 °C
Tige de piston	Hardened steel, thick-chromed
Tube	Aluminium jacket with integrated T-slots
Pistons	Aluminium
Joint de piston	TPU (thermoplastic polyurethane)
Joint d'étanchéité de tige de piston	TPU (thermoplastic polyurethane)
Joint torique en matériau étanche	NBR

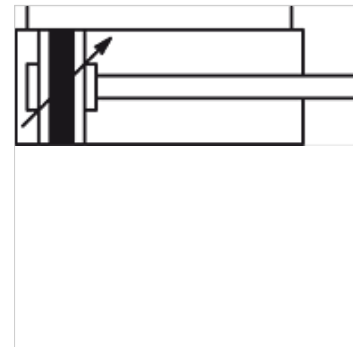

Remarque

Autres informations sur demande.

Description

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches are mounted in T-slots on three sides of the body.

Informations supplémentaires

Important: The scope of supply does not include a connector. Please order separately.

Stroke 1000 available on request.

Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Ø tige de piston (mm)	Filetage extérieur-tiges de piston
K- 07 15 14 66	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 14 67	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 14 68	32 mm	75	G 1/8	12	M 10 x 1.25
K- 07 15 14 69	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 14 70	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 14 71	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 14 72	32 mm	150	G 1/8	12	M 10 x 1.25
K- 07 15 14 73	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 14 74	32 mm	175	G 1/8	12	M 10 x 1.25
K- 07 15 14 75	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 14 76	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 14 77	32 mm	300	G 1/8	12	M 10 x 1.25
K- 07 15 14 78	32 mm	350	G 1/8	12	M 10 x 1.25
K- 07 15 14 79	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 14 89	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 14 80	32 mm	450	G 1/8	12	M 10 x 1.25
K- 07 15 14 81	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 14 82	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 14 83	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 14 84	40 mm	75	G 1/4	16	M 12 x 1.25
K- 07 15 14 85	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 14 86	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 14 87	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 14 88	40 mm	150	G 1/4	16	M 12 x 1.25
K- 07 15 14 90	40 mm	175	G 1/4	16	M 12 x 1.25
K- 07 15 14 91	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 14 92	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 14 93	40 mm	300	G 1/4	16	M 12 x 1.25
K- 07 15 14 94	40 mm	350	G 1/4	16	M 12 x 1.25
K- 07 15 14 95	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 14 96	40 mm	450	G 1/4	16	M 12 x 1.25
K- 07 15 14 97	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 14 98	40 mm	600	G 1/4	16	M 12 x 1.25

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials



Article					
Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Ø tige de piston (mm)	Filetage extérieur-tiges de piston
K- 07 15 14 99	40 mm	700	G 1/4	16	M 12 x 1.25
K- 07 15 15 00	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 15 01	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 15 02	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 15 03	50 mm	75	G 1/4	20	M 16 x 1.5
K- 07 15 15 04	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 15 05	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 15 06	50 mm	1000	G 1/4	20	M 16 x 1.5
K- 07 15 15 07	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 15 08	50 mm	150	G 1/4	20	M 16 x 1.5
K- 07 15 15 09	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 15 10	50 mm	175	G 1/4	20	M 16 x 1.5
K- 07 15 15 11	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 15 12	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 15 13	50 mm	300	G 1/4	20	M 16 x 1.5
K- 07 15 15 14	50 mm	350	G 1/4	20	M 16 x 1.5
K- 07 15 15 15	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 15 16	50 mm	450	G 1/4	20	M 16 x 1.5
K- 07 15 15 17	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 15 18	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 15 19	50 mm	700	G 1/4	20	M 16 x 1.5
K- 07 15 15 20	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 15 21	50 mm	900	G 1/4	20	M 16 x 1.5
K- 07 15 15 22	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 15 23	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 15 24	63 mm	75	G 3/8	20	M 16 x 1.5
K- 07 15 15 25	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 15 26	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 15 27	63 mm	1000	G 3/8	20	M 16 x 1.5
K- 07 15 15 28	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 15 29	63 mm	150	G 3/8	20	M 16 x 1.5
K- 07 15 15 30	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 15 31	63 mm	175	G 3/8	20	M 16 x 1.5
K- 07 15 15 32	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 15 33	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 15 34	63 mm	300	G 3/8	20	M 16 x 1.5
K- 07 15 15 35	63 mm	350	G 3/8	20	M 16 x 1.5
K- 07 15 15 36	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 15 37	63 mm	450	G 3/8	20	M 16 x 1.5
K- 07 15 15 38	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 15 39	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 15 40	63 mm	700	G 3/8	20	M 16 x 1.5
K- 07 15 15 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 15 42	63 mm	900	G 3/8	20	M 16 x 1.5
K- 07 15 15 43	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 15 44	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 15 45	80 mm	75	G 3/8	25	M 20 x 1.5
K- 07 15 15 46	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 15 47	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 15 48	80 mm	1000	G 3/8	25	M 20 x 1.5
K- 07 15 15 49	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 15 50	80 mm	150	G 3/8	25	M 20 x 1.5
K- 07 15 15 51	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 15 52	80 mm	175	G 3/8	25	M 20 x 1.5
K- 07 15 15 53	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 15 54	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 15 55	80 mm	300	G 3/8	25	M 20 x 1.5
K- 07 15 15 56	80 mm	350	G 3/8	25	M 20 x 1.5
K- 07 15 15 57	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 15 58	80 mm	450	G 3/8	25	M 20 x 1.5
K- 07 15 15 59	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 15 60	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 15 61	80 mm	700	G 3/8	25	M 20 x 1.5



En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.

28.12.2025

HANSA-FLEX AG

www.hansa-flex.com

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials



Article

Désignation	Ø pistons	Chariot élévateur (mm)	Raccord	Ø tige de piston (mm)	Filetage extérieur-tiges de piston
K- 07 15 15 62	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 63	80 mm	900	G 3/8	25	M 20 x 1.5
K- 07 15 14 26	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 14 27	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 14 28	100 mm	75	G 1/2"	25	M 20 x 1.5
K- 07 15 14 29	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 14 30	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 14 31	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 14 32	100 mm	150	G 1/2"	25	M 20 x 1.5
K- 07 15 14 33	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 14 34	100 mm	175	G 1/2"	25	M 20 x 1.5
K- 07 15 14 35	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 14 36	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 14 37	100 mm	300	G 1/2"	25	M 20 x 1.5
K- 07 15 14 38	100 mm	350	G 1/2"	25	M 20 x 1.5
K- 07 15 14 39	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 14 40	100 mm	450	G 1/2"	25	M 20 x 1.5
K- 07 15 14 41	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 14 42	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 14 43	100 mm	700	G 1/2"	25	M 20 x 1.5
K- 07 15 14 44	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 14 45	100 mm	900	G 1/2"	25	M 20 x 1.5
K- 07 15 14 46	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 14 47	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 14 48	125 mm	75	G 1/2"	32	M 27 x 2
K- 07 15 14 49	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 14 50	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 14 51	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 14 52	125 mm	150	G 1/2"	32	M 27 x 2
K- 07 15 14 53	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 14 54	125 mm	175	G 1/2"	32	M 27 x 2
K- 07 15 14 55	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 14 56	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 14 57	125 mm	300	G 1/2"	32	M 27 x 2
K- 07 15 14 58	125 mm	350	G 1/2"	32	M 27 x 2
K- 07 15 14 59	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 14 60	125 mm	450	G 1/2"	32	M 27 x 2
K- 07 15 14 61	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 14 62	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 14 63	125 mm	700	G 1/2"	32	M 27 x 2
K- 07 15 14 64	125 mm	800	G 1/2"	32	M 27 x 2
K- 07 15 14 65	125 mm	900	G 1/2"	32	M 27 x 2

Accessoires

K-FUSSBEFESTIGUNG TYP LB 2	Foot model, »LB« type
K-SCHWENKLAGEBOECKE TYP TF	Hinge bracket model, »TF« type (only in conjunction with hinge head model, »FTC« type)
K-GEGENLAGER TYP CR	Counter-hinge model, »CR« type (only in conjunction with female hinge model, »CB« type)
K-SCHWENKGABELBEFESTIG FTC	Hinge head model, »FTC« type
K-SCHWENKLAGE TYP TM	Hinge model, »TM« type (only in conjunction with hinge head model, »FTC« type)
K-SCHWENKGABELBEFESTIG CB	Female hinge model, »CB« type
K-SCHWENKAUGENBEFESTIG CA	Male hinge model, »CA« type
K-FLANSCHBEFESTIGUNG TYP FA1	Flange model, »FA« type
K-GABELKOEPE TYP Y	Fork model, »Y« type
K-GELENKAUGEN TYP UNIT	Rod eye model, »UNIT« type
K-SENSOREN CS1 NO MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 NO OHNE STECKER	Sensors »CS1« type, cable without plug