
K-SCHALLDAE FRUEHWARNFUKT

Silencers with early warning function

Caractéristiques

Pression de service	5 bar
Température de service	Max. 70 °C
Norme	G thread acc. to DIN EN ISO 228-1
Matériau	PP



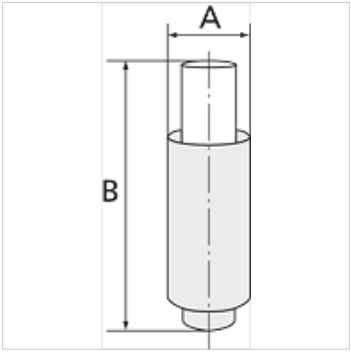

Remarque

Autres informations sur demande.

Description

The silencer’s warning indicator gives an early warning if the back pressure in the system is too high. Maintenance personnel can both see and hear (from the elevated sound level) that it is time to replace the silencer before costly and unnecessary disruptions impair operation.
The design is based on a two-chamber system with inner and outer silencing chambers.
The inner diffuser serves as a warning indicator that is pressed out when back pressure is too high.
The silencer should be replaced as soon as the inner diffuser extends far enough to show the red marking on the warning indicator.

Article

Désignation	Filets	A (mm)	B (mm)	Débit (L/min)	Niveau de bruit (dBA)	Réduction de bruit
K- 07 40 15 22	G 1/8 male	15,7	35,5	450	65,5	32 dB(A)
K- 07 40 15 23	G 1/4 male	19,6	42,6	883	66,5	33 dB(A)
K- 07 40 15 24	G 3/8 male	26,8	57,0	1480	73,2	30 dB(A)
K- 07 40 15 25	G 1/2 male	32,4	73,5	1910	76,5	33 dB(A)

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.