



# K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

**HANSA FLEX**

## Caractéristiques

Pression de service	Max. 10 bar, vacuum
Domaine d'utilisation	Air, vacuum
Tuyaux recommandés	PU or PA (nylon)
Médiums	Air comprimé
Norme	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Plage de température	0 °C to +60 °C
Surface d'étanchéité	O-ring (NBR)
Matériau	Plastic, Nickel plated brass
Bague de pression	Plastic

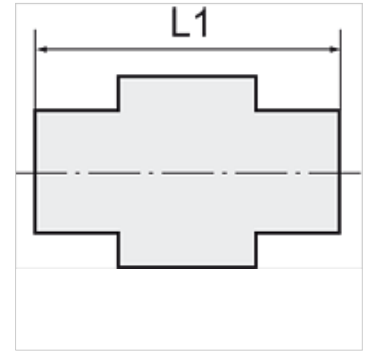

## Remarque

Autres informations sur demande.

## Description

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Article

Désignation	Filets	pour Ø ext. du tuyau	L1 (mm)	Pression d'ouverture (bar)	SW
K- 07 40 08 83	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 78	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 79	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 80	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 76	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 77	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 81	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 82	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 74	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 75	G 1/2	12 mm	44,5	0,2	24 mm