



# K-XRD STECKANSCHLUSS Z GEW AGR-K BE

Straight non-return valves, flow direction from tube to port, conical male thread, coated

**HANSA FLEX**

## Caractéristiques

|                       |  |
|-----------------------|--|
| Pression de service   | Max. 10 bar, vacuum                      |
| Domaine d'utilisation | Air, vacuum                              |
| Tuyaux recommandés    | PU or PA (nylon)                         |
| Médiums               | Air comprimé                             |
| Norme                 | R thread acc. to ISO 7-1, thread coating |
| Plage de température  | 0 °C to +60 °C                           |
| Surface d'étanchéité  | Conical version: thread coating          |
| Matériau              | Plastic, Nickel plated brass             |
| Bague de pression     | Plastic                                  |

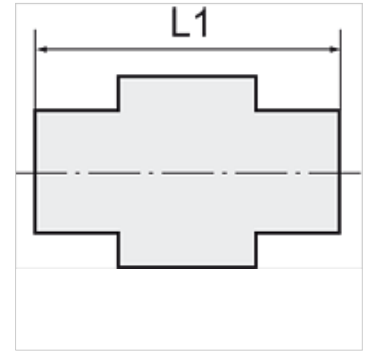

## Remarque

Autres informations sur demande.

## Description

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Article

| Désignation    | Filets | pour Ø ext. du tuyau | L1 (mm) | Pression d'ouverture (bar) | SW    |
|----------------|--------|----------------------|---------|----------------------------|-------|
| K- 07 40 08 97 | R 1/8  | 4 mm                 | 24,0    | 0,2                        | 10 mm |
| K- 07 40 08 98 | R 1/8  | 6 mm                 | 31,0    | 0,2                        | 12 mm |
| K- 07 40 08 99 | R 1/8  | 8 mm                 | 32,8    | 0,2                        | 14 mm |
| K- 07 40 08 95 | R 1/4  | 6 mm                 | 33,0    | 0,2                        | 14 mm |
| K- 07 40 08 96 | R 1/4  | 8 mm                 | 34,8    | 0,2                        | 14 mm |
| K- 07 40 09 00 | R 3/8  | 10 mm                | 41,0    | 0,2                        | 17 mm |
| K- 07 40 09 01 | R 3/8  | 12 mm                | 42,5    | 0,2                        | 21 mm |
| K- 07 40 08 93 | R 1/2  | 10 mm                | 43,0    | 0,2                        | 21 mm |
| K- 07 40 08 94 | R 1/2  | 12 mm                | 44,5    | 0,2                        | 21 mm |