

# K-T-VB PP

Union tees

**HANSA FLEX**


## Caractéristiques

Pression de service on request

Température de service Max. +20 °C

Matériau Polypropylène (PP)

Matériau étanche NBR

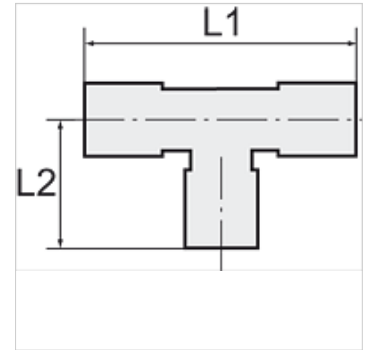

## Remarque

Autres informations sur demande.

## Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7