
K-T-VB PP
Union tees

Caractéristiques

Pression de service	on request
Température de service	Max. +20 °C
Matériau	Polypropylene (PP)
Matériau étanche	NBR



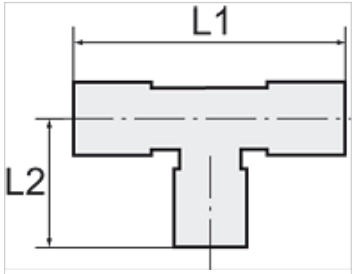

Remarque
Autres informations sur demande.

Description
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.