

K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection

Caractéristiques

Pression de service Max. 10 bar, vacuum

Domaine d'utilisation Air, vacuum

Tuyaux recommandés PU or PA (nylon)


Médiums Air comprimé

Plage de température 0 °C to +60 °C

Surface d'étanchéité O-ring (NBR)

Matériau Plastic, Nickel plated brass

Bague de pression Plastic

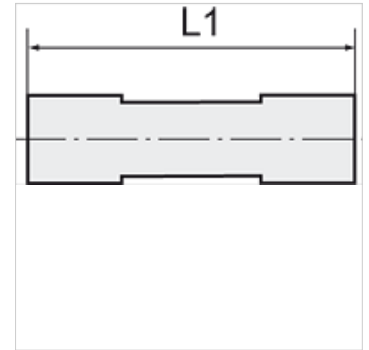

Remarque

Autres informations sur demande.

Description

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	Pression d'ouverture (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2