
K-T-RED VERBINDER POM

Union tees, unequal

Caractéristiques

Pression de service	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Température de service	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Matériau	Acetalpolymerisat (POM)
Matériau étanche	NBR



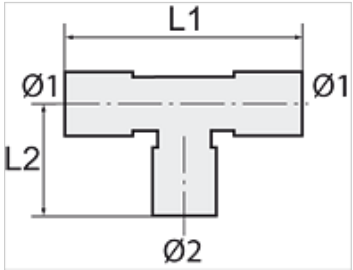

Remarque

Autres informations sur demande.

Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Article

Désignation	pour Ø1 extérieur de tuyau (mm)	pour Ø2 extérieur de tuyau (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.